UPort® 1600-16 Series

-16-port RS-232 and RS-232/422/485 USB-to-serial converters



- > Hi-Speed USB 2.0 for up to 480 Mbps USB transmission
- > 921.6 kbps maximum baudrate for super fast data transmission
- > 15N high retention USB Type B connector
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Standard 19-inch rack-mountable
- > COM port assignments maintained across different PCs
- > Supports fixed-base COM Utility for setting the initial extended COM port number
- > Mini DB9 female to terminal block adapter for easy wiring
- > Drivers provided for Windows, WinCE, and Linux



Overview

The UPort® 1600-16 USB-to-serial converters allow you to connect 16 RS-232 or RS-232/422/485 devices to your laptop or workstation through the USB (Universal Serial Bus) port. The UPort® 1600-16


Typical Application—TFT-LCD Manufacturing

Manufacturing TFT-LCD (thin-film transistor liquid crystal display) panels is a complicated and highly technical process. The three major stages in TFT-LCD panel production are the array, LC cell, and module assembly processes. In addition, each finished panel must also pass a series of quality inspection tests, which include defect inspection and lighting tests. The most challenging part of the TFT-LCD manufacturing process is achieving zero fault tolerance for high quality and productivity. One of our customers needed a USB-to-serial solution to transmit data between a host and quality inspection equipment in the TFT-LCD manufacturing process. In such a demanding manufacturing environment, adopting multiple ports and Moxa's ruggedly designed UPort® 1650-16 USB-to-serial converter proved to be the best option.

converters are compatible with new and legacy serial devices, and they are perfect for instrumentation and manufacturing applications.

The UPort® 1650-16 has the following features:

- Standard 19-inch rackmount size and metal housing for industrial-grade requirements
- Up to 16 ports for easy USB-to-serial expansion
- 3-in-1 serial ports for a cost-effective solution
- True USB 2.0 Hi-Speed transmission for greater productivity
- 128-byte FIFO and on-chip hardware and software flow control to ensure stable data transmission during inspection
- · Each serial port has its own LED indicator for easy troubleshooting

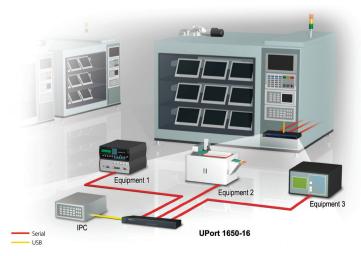

10

Specifications

USB Interface

Compliance: USB 1.1/2.0 compliant Connector: USB Type B Speed: 480 Mbps (Hi-Speed USB) and 12 Mbps (Full-Speed USB)

Serial Interface

Number of Ports: 16 Serial Standards: UPort 1610-16: RS-232 UPort 1650-16: RS-232/422/485 Connector: DB9 male

Performance

Baudrate: 50 bps to 921.6 kbps (including 500 kbps) Serial Communication Parameters

Data Bits: 5, 6, 7, 8 Stop Bits: 1, 1.5, 2 Parity: None, Even, Odd, Space, Mark Flow Control: RTS/CTS, XON/XOFF FIF0: 128 bytes

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND RS-422: TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND RS-485-4w: TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND RS-485-2w: Data+(B), Data-(A), GND RS-485 Data Direction: ADDC® (Automatic Data Direction Control)

Operating Systems

Windows Real COM Drivers: Windows 2000, Windows XP/2003/ Vista/2008/7/8/8.1/10 (x86/x64), Windows 2012 (x64), Windows Embedded CE 5.0/6.0

Linux Real TTY Drivers: Linux 2.4.x, 2.6.x, 3.x Android Driver: Android 3.1.x and later

Note: Please refer to Moxa's website for the latest driver support information.

Physical Characteristics

Housing: SECC sheet metal (1 mm) Weight:

Product only: 2475 g (5.45 lb) Packaged: 3485 g (7.68 lb) **Dimensions:** 440 x 45.5 x 198.1 mm (17.32 x 1.79 x 7.80 in)

Environmental Limits

Operating Temperature: 0 to 55°C (32 to 131°F) Storage Temperature: -20 to 75°C (-4 to 167°F) Ambient Relative Humidity: 5 to 95% (non-condensing)

Crdering Information

Available Models

UPort 1610-16: 16-port RS-232 USB-to-serial converter UPort 1650-16: 16-port RS-232/422/485 USB-to-serial converter Optional Accessories (can be purchased separately)

Mini DB9F-to-TB: DB9 female to terminal block connector

CBL-USBA/B-100: USB Type A to USB Type B cable, 100 cm

CBL-F9M9-150: DB9 female to DB9 male serial cable, 150 cm

CBL-F9M9-20: DB9 female to DB9 males serial cable, 20 cm

CBL-RJ45SF9-150: RJ45 to DB9 female shielded serial cable, 150 cm

ADP-RJ458P-DB9: DB9 female to RJ45 connector

MOXA

A-ADP-RJ458P-DB9F-ABC01: DB9 female to RJ45 connector

WK-44-01: 19" rackmount L brackets (2 L-shaped plates with 8 screws) Note: One power cord suitable for your region is included in the product package. Additional power adapters

and power cords can be purchased separately. Please refer to the Power Accessory Selection Guide for details.

Standards and Certifications

Safety: UL 60950-1 EMC: EN 55032/24 EMI: CISPR 32, FCC Part 15B Class A EMS: IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 1 kV; IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m IEC 61000-4-8 PFMF Green Product: RoHS, CROHS, WEEE

Power Requirements


Input Voltage: 100 to 240 VAC Input Current: 220 mA @ 100 VAC MTBF (mean time between failures) Time: UPort 1610-16: 138,704 hrs

UPort 1650-16: 120,001 hrs Standard: MIL-HDBK-217F

Warranty

Warranty Period: 5 years Details: See www.moxa.com/warranty

-Dimensions -



Package Checklist

- 1 UPort 1600-16 USB-to-serial converter
- USB cable: CBL-USBA/B-100
- 1 power cord suitable for your region
- 1 serial adapter: mini DB9F-to-TB (UPort 1650-16 only)
- 1 pair of 19" rackmount L brackets: WK-44-01
- Documentation and software CD
- Quick installation guide (printed)
- · Warranty card

Power Accessory Selection Guide

Barrel Plug Type		Non-locking barrel plug Locking barrel plug							
0/P		12 VDC, 1.5 A, 100 to 240 VAC	VDC, 1.5 A, 100 to 240 VAC 12 VDC, 3 A 100 to 240 VAC (Switch Mode)						
Plug Type		CN	US/JP	EU AU		UK	CN		
Model Name		PWR-12150-CN-S2	PWR-12300-WPUSJP-S1	PWR-12300-WPEU-S1	PWR-12300-WPAU-S1	PWR-12300-WPUK-S1	PWR-12300-WPCN-S1		
Appearance		No.	P.C.	P.C.	P.C.	P.C.	F		
	UPort 1250	-	-	-	-	-	-		
2 ports	UPort 1250I	√	-	-	-	-	-		
	UPort 2210	-	-	-	-	-	-		
	UPort 1410	√	-	-	-	-	-		
4 ports	UPort 1450	\checkmark	-	-	-	-	-		
	UPort 1450I	√	-	-	-	-	-		
	UPort 2410	-	-	-	-	-	-		
	UPort 204	-	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		
	UPort 404	-	\checkmark	✓	\checkmark	✓	\checkmark		
7 ports	UPort 207	-	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		
rports	UPort 407	-	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		
8 ports	UPort 1610-8	\checkmark	-	-	-	-	-		
o putts	UPort 1650-8	√	-	-	-	-	-		

Barrel Plug Type O/P		Locking barrel plug							
		12 VDC 2 A, 100 to 240 VAC (desktop type)	2.5A/250 V Power Cord,	, 183 cm					
Plug Type		Must be used with a power cord	US	JP	EU	AU	ик		
Model Name		PWR-12125-DT-S2	PWC-C7US-2B-183	PWC-C7JP-2B-183	PWC-C7EU-2B-183	PWC-C7AU-2B-183	PWC-C7UK-2B-183		
Appearance		A	r Br	r Gr	18+	Se	R		
2 ports	UPort 1250	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		
	UPort 1250I	√	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		
	UPort 2210	-	-	-	-	-	-		
	UPort 1410	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		
4 ports	UPort 1450	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		
	UPort 1450I	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		
	UPort 2410	-	-	-	-	-	-		
	UPort 204	-	-	-	-	-	-		
	UPort 404	-	-	-	-	-	-		
7 ports	UPort 207	-	-	-	-	-	-		
	UPort 407	-	-	-	-	-	-		
8 ports	UPort 1610-8	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		
	UPort 1650-8	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark	\checkmark		

Model Name	PWC-C13US-3B-183	PWC-C-13EU-3B-183 (CEE 7/7 to IEC C13)	PWC-C13UK-3B-183	PWC-C13JP-3B-183	PWC-C13AU-3B-183	PWC-C13CN-3B-183	
Appearance							
Region	US	EU	UK	JP	AU	CN	
Voltage	125 V	250 V	250 V	125 V	250 V	250 V	
Thickness	6.3 ± 0.2 mm	6.7 ± 0.2 mm	6.7 ± 0.2 mm	7.0 ± 0.2 mm	6.7 ± 0.2 mm	6.7 ± 0.2 mm	
Max. Current	10 A	10 A	10 A	7 A	10 A	10 A	
Length	1830 ± 30 mm	1830 ± 30 mm	1830 ± 30 mm	1830 ± 30 mm	1830 ± 30 mm	1830 ± 30 mm	
Related Products	UPort 1610-16, UPort 1650-16						

MOXA