PowerWalker VFI 6000-10000 RTG(S) Series

- True Double Conversion Technology with high output Power Factor 1.0
- Human Interface Device (HID) compatible USB connection (no additional drivers needed)
- Highly efficient (>95%), Energy saving solution with long autonomy time in great price
- 3-level inverter topology for increased efficiency and high power density
- Parallel operation up to 3 units
- Included Power Distribution Unit

The PowerWalker VFI 6000-10000 RTG series offers a professional solution for IT and office environment. They are available with different designs:

- RTG: Marketing name of the series and also standard rack UPS with BP as a set
- RTGE: Only the electronics part (the engine of the UPS), without battery pack.
- RTGS: Long-run version with strong charger for big external batteries (no battery pack in the package)

The VFI RTG series is detected as Human Interface Device (HID) Power Device by the internal O/S drivers and can be managed without additional software. It finds its application in all dedicated systems for kiosks, ATMs as well as in high security level systems, where additional software is not allowed (i.e. banking).

SERIES	VFI 6000-10000 RTG & RTGS					
INPUT						
Voltage	160-276 VAC at 100% load					
Voltage	110-160VAC range linear between 50-100% load					
Input PF	≥ 0.995 at full load					
Frequency Range	45Hz - 55Hz / 55Hz - 65Hz					
. , ,	40Hz - 70Hz at load ≤60%					
OUTPUT						
Voltage	208/220/230/240 VAC					
Pure Sine Wave	Yes					
THDv	≤1% Full Linear Load; ≤5% Non-Linear Load					
Voltage Regulation (Bat. Mod.)	±1%					
Frequency (Battery Mode)	±0,1Hz					
TECHNICAL DETAILS						
Load Crest Ratio	3:1					
Transfer Time [AC to Battery]	Oms					
Transfer Time [Inverter to Bypass]	Oms					
Generator support	Yes					
Overload Capacity	10min @105%-125%; 30s @125%-150%; 500ms @ >150%					
External Battery Connection	Yes					
Parallel operation	Yes, up to 3 units of the same size					
COMMUNICATION AND CONNEC	TIONS					
Software	WinPower					
USB	Yes, with HID support					
RS-232	Yes					
Intelligent Slot	Yes					
EPO	Yes					



ACCESSORIES



10120517 - NMC Card



10120545 - EMD for NMC Card



10120564 - Modbus Card



10120528 - AS400 Card 3





(PowerWalker



Included Power Distribution

Back view

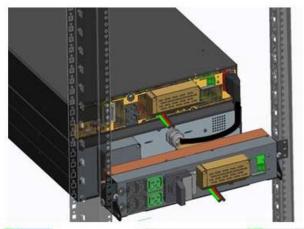

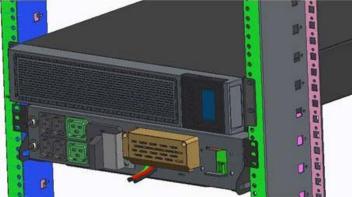





MODEL	VFI 6000 RTG	VFI 10000 RTG	VFI 6000 R	TGS	VFI 10000 RTGS		
Item Number	10122132	10122133	1012213	30	10122131		
EAN	4260074980318	4260074980325	4260074980172		4260074980189		
Power (kVA)	6000VA	10000VA	6000VA		10000VA		
Power (kW)	6000W	10000W	6000W		10000W		
BATTERIES							
Batteries	16x 12V/7Ah	16x 12V/9Ah	None				
Battery Connector			Yes				
DC Voltage	192\		240VDC				
Charger	0-4A [Default 1.4A]	0-4A [Default 2A]		0-12A [4A]			
Charging Time	3h to	3h to 90%					
Full Load Backup Time	4m	Battery related					

BATTERY PACKS AND BACKUP TABLE

FULL LOAD	HALF LOAD	1000W	2000W	3000W	4000W	5000W	6000W	7000W	8000W	9000W	10000W
4.0	10.7	49.8	19.1	10.7	7.1	5.2	4.0				
9.5	25.0	113.9	44.0	25.0	16.8	12.3	9.5				
19.3	47.6	222.5	83.2	47.6	32.0	23.5	18.3				
2.8	7.1	64.1	23.8	14.3	9.7	7.1	5.5	4.5	3.7	3.2	2.8
7.1	18.3	172.7	64.1	36.9	24.9	18.3	14.3	11.6	9.7	8.2	7.1
12.4	31.9	308.5	114.5	64.1	43.3	31.9	24.9	20.2	16.8	14.3	12.4
	4.0 9.5 19.3 2.8 7.1	LOAD LOAD 4.0 10.7 9.5 25.0 19.3 47.6 2.8 7.1 7.1 18.3	LOAD LOAD 1000W 4.0 10.7 49.8 9.5 25.0 113.9 19.3 47.6 222.5 2.8 7.1 64.1 7.1 18.3 172.7	LOAD LOAD 1000W 2000W 4.0 10.7 49.8 19.1 9.5 25.0 113.9 44.0 19.3 47.6 222.5 83.2 2.8 7.1 64.1 23.8 7.1 18.3 172.7 64.1	LOAD LOAD 1000W 2000W 3000W 4.0 10.7 49.8 19.1 10.7 9.5 25.0 113.9 44.0 25.0 19.3 47.6 222.5 83.2 47.6 2.8 7.1 64.1 23.8 14.3 7.1 18.3 172.7 64.1 36.9	LOAD LOAD 1000W 2000W 3000W 4000W 4.0 10.7 49.8 19.1 10.7 7.1 9.5 25.0 113.9 44.0 25.0 16.8 19.3 47.6 222.5 83.2 47.6 32.0 2.8 7.1 64.1 23.8 14.3 9.7 7.1 18.3 172.7 64.1 36.9 24.9	LOAD LOAD 1000W 2000W 3000W 4000W 5000W 4.0 10.7 49.8 19.1 10.7 7.1 5.2 9.5 25.0 113.9 44.0 25.0 16.8 12.3 19.3 47.6 222.5 83.2 47.6 32.0 23.5 2.8 7.1 64.1 23.8 14.3 9.7 7.1 7.1 18.3 172.7 64.1 36.9 24.9 18.3	LOAD LOAD 1000W 2000W 3000W 4000W 5000W 6000W 4.0 10.7 49.8 19.1 10.7 7.1 5.2 4.0 9.5 25.0 113.9 44.0 25.0 16.8 12.3 9.5 19.3 47.6 222.5 83.2 47.6 32.0 23.5 18.3 2.8 7.1 64.1 23.8 14.3 9.7 7.1 5.5 7.1 18.3 172.7 64.1 36.9 24.9 18.3 14.3	LOAD LOAD 1000W 2000W 3000W 4000W 5000W 6000W 7000W 4.0 10.7 49.8 19.1 10.7 7.1 5.2 4.0 9.5 9.5 25.0 113.9 44.0 25.0 16.8 12.3 9.5 9.5 19.3 47.6 222.5 83.2 47.6 32.0 23.5 18.3 1 2.8 7.1 64.1 23.8 14.3 9.7 7.1 5.5 4.5 7.1 18.3 172.7 64.1 36.9 24.9 18.3 14.3 11.6	LOAD LOAD 1000W 2000W 3000W 4000W 5000W 6000W 7000W 8000W 4.0 10.7 49.8 19.1 10.7 7.1 5.2 4.0 800W 80W	LOAD LOAD 1000W 2000W 3000W 4000W 5000W 6000W 7000W 8000W 9000W 4.0 10.7 49.8 19.1 10.7 7.1 5.2 4.0 9.5 25.0 113.9 44.0 25.0 16.8 12.3 9.5 </td

11/07/2017

