



PIN OUT
P1 (TV9.5 PLUG) P2 (TV9.5 SOCKET)



⊙ CENTER PIN
⊖ SHEEL

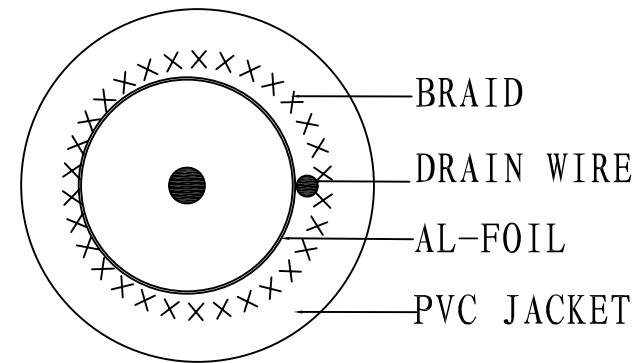

NOTES:
1. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
2. ALL MATERIAL BE RoHS COMPLIANT.

⑦	TAG	1PCS	DELTACO TAG
⑥	HOOD MOLD	2PCS	BLACK PVC
⑤	CORE MOLD	2PCS	BLACK PVC
④	CORE	8PCS	OD*ID*L: 7.5*5.5*9.5mm
③	TV9.5 SOCKET	1PCS	GOLD PLATED SHELL
②	TV9.5 PLUG	1PCS	GOLD PLATED SHELL
①	CABLE	1PCS	1/0.5mm+PE+ADB+PVC OD:5.5mm BLACKPVC JACKET (75 Ohm)
NO.	PARTS NAMF	Q'TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	AN-202
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

9.5mm/M-9.5mm/F
3C-2V

