




RoHS Compliant

DESCRIPTION OF CHANGE
INITIAL RELEASE

DATE
2012-10-10


REV
A0

14.0 ± 10mm

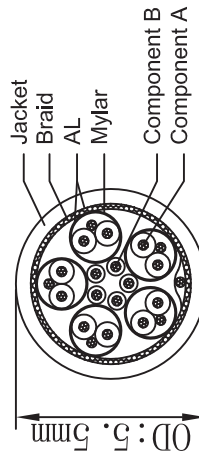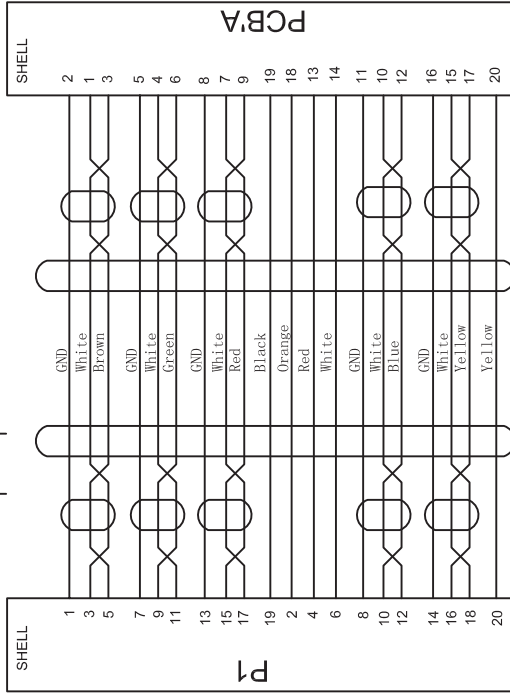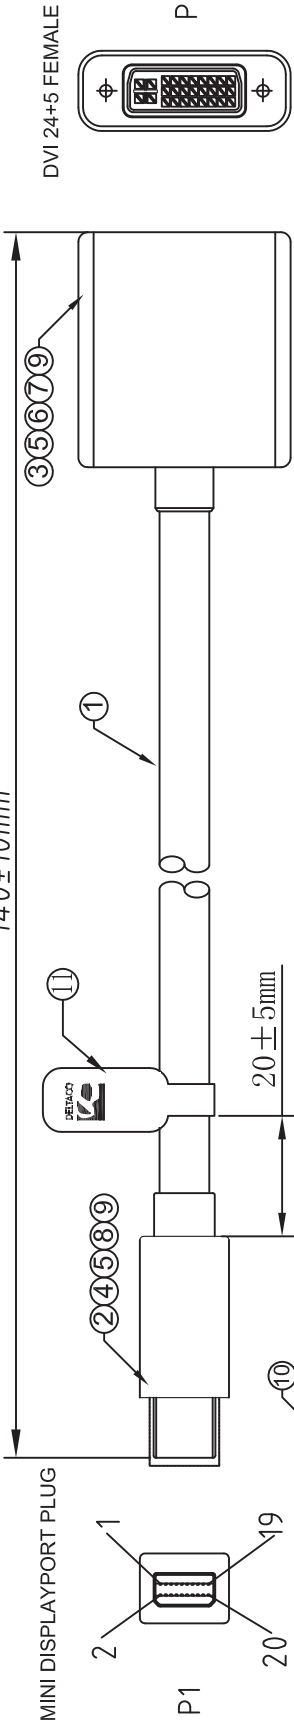

NOTES:

1. ELECTRICAL PROPERTIES:
 - 1.1 100% open and short test.
 - 1.2 Conductor resistance: 5 OHMS
 - 1.3 Insulation resistance: 10 MEGOHMS
 - 1.4 Hi pot: DC300V/0.01S
 - 1.5 Audio & Video test, Output resolution: 1920*1080 P
2. All material be ROHS compliant.

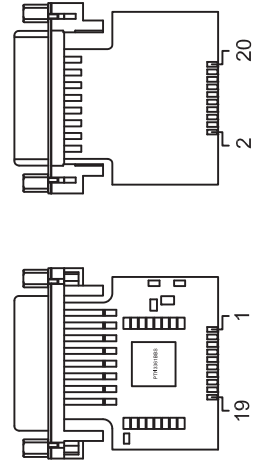

NXP PCB A

11	Tag	AM-BK0283	Black background, White character (DP-DVI6)	1 Pcs
10	Dust cap	OR-0007	MINI DP Dust cap	1 Pcs
9	PVC	PVC-0001	60P PVC Black	9.70g
8	PE	PE-0001	LDPE (rolls)	1.60g
7	Lid	SL-BK0022	DVI Black Shell	1 Pcs
6	Shell	SL-BK0133	VGA, DVI, HDMI Black Shell (smooth)	1 Pcs
5	Lid	SL-BK0125	Mini DP Black Shell	1 Pcs
4	Shell	SL-BK0094	Mini DP Black Shell (smooth)	1 Pcs
3	Connector	BM-F-022-GF-NX	ADVI (F) 24+5 PCB A (AN), gold-plated	1 Pcs
2	Connector	CN-G0001	Mini DP (M), gold-plated	1 Pcs
1	Cable	DP1-55-3207	UL20276 (32AWG*P+D+AL/MY)*5C+32AWG*5C+MY/AL+BRAID, JACKET PVC Black, OD=5.5±0.20mm L=170±5/-0mm	1 Pcs
NO.	Material name	Item number	Specifications Description	Quantity



图号 (DWG NO)	XVA0589	单位 (UNIT):	MM
版次 (REV):	A0	比例 (SCALE):	1:1
页次 (PAGE):	1/1	审核 (CHECKED)	Dean
设计 (DESIGN)	Dean	批准 (APPROVED)	
品名 (ITEM NO)	Mini DP to DVI (24+5) Cable		
料号 (PART NO)	DP-DVI6		

UNITS ARE IN MILLIMETERS TOLERANCES:
 LINEAR: X ± 0.1
 Y, Z ± 0.15
 ANGULAR: ° ± 0.5