


PIN OUT

P1		P2
1	⊗	1
2		2
3		3
4	⊗	4
5		5
3	⊗	3
9		9
10	⊗	10
11		11
12	⊗	12
13		13
11	⊗	11
17		17
18	⊗	18
19		19
20	⊗	20
21		21
19	⊗	19
23		23
24	⊗	24
22		22
6	⊗	6
7		7
14		14
15		15
16		16
SHELL	D+B	SHELL

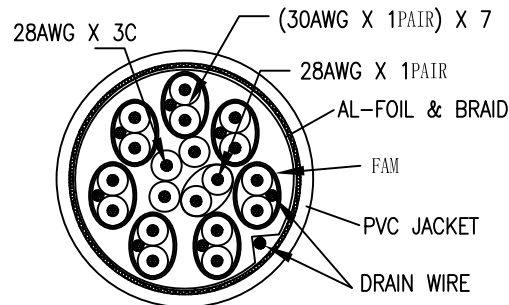

⑧	TAG	1PCS	DELTACO TAG
⑦	CORE MOLD	2PCS	BLACK PVC
⑥	CORE	2PCS	OD*ID*L: 17.5*10.5*28.5mm
⑤	SCREW	1PCS	#4-40 UNC, HOOD MOLDED: BLACK PVC
④	DVI HOOD	2PCS	BLACK PVC
③	DVI(24+1)F	1PCS	GOLD PLATED SHELL, WITH COLD SCREW NUT
②	DVI(24+1)M	1PCS	GOLD PLATED SHELL
①	CABLE	1PCS	(30AWG*1P+D+FAM)*7+28AWG*1P+28AWG*3C +AEB OD:8.6mm BLACK PVC JACKET
NO.	PARTS NAME	Q'TY	SPECIFICATION

NOTES:

1.ELECTRICAL PROPERTIES:

1.1 100% OPEN AND SHORT TEST

1.2 CONDUCTOR RESISTANCE: 5 OHMS

1.3 INSULATION RESISTANCE: 10 MEGOHMS

1.4 HI-POT: DC300V/0.01S

1.5 100% HDTV, BLUE RAY DVD TEST(1080P:UP TO 7M);
(1080i: 10M,15M)

1.6 ALL CABLE PRODUCTION PROCESS ARE CONTROLLED
BY ATC TEST DEVICE.

2. ALL MATERIAL BE RoHS COMPLIANT.

APPROVED	CHECKED	DRAWN	CUSTOMER:
			ITEM NO. DVI-602B
			DRAW NO.
			UNIT mm
			SCALE NONE

DESCRIPTION:

DVI(24+1)/M-DVI(24+1)/F

