


PIN OUT		PIN OUT	
P1	P2	P1	P2
C1	C1 RED	1	1
C5	C5 GREEN	2	2
C2	C2 GREEN	3	3
C5	C5	9	9
C3	C3 BLUE	10	10
C5	C5	11	11
C4	C4	17	17
		18	18
		19	19
		23	23
		24	24
		22	22
		6	6
		7	7
		8	8
		14	14
		15	15
		16	16
		SHELL	D+B SHELL

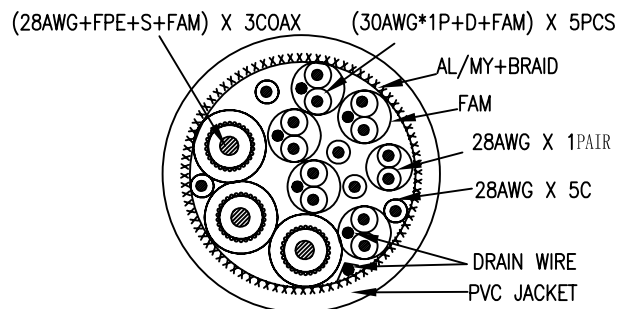

NO.	PARTS NAME	Q'TY	SPECIFICATION
⑦	TAG	1PCS	DELTACO TAG
⑥	CORE MOLD	2PCS	BLACK PVC
⑤	CORE	2PCS	OD*ID*L: 17.5*10.5*28.5mm
④	SCREW	2PCS	#4-40 UNC, HOOD MOLDED: BLACK PVC
③	DVI HOOD	2PCS	BLACK PVC
②	DVI(18+5)M	1PCS	GOLD PLATED SHELL
①	CABLE	1PCS	(30AWG*1P+D+FAM)*4+(28AWG+S+FAM)*3+28AWG*1P+28AWG*5C+AEB OD:9.0mm BLACK PVC JACKET

NOTES:

1.ELECTRICAL PROPERTIES:

- 1.1 100% OPEN AND SHORT TEST
- 1.2 CONDUCTOR RESISTANCE: 5 OHMS
- 1.3 INSULATION RESISTANCE: 10 MEGOHMS
- 1.4 HI-POT: DC300V/0.01S
- 1.5 100% HDTV, BLUE RAY DVD TEST(1080P:UP TO 7M); (1080I: 10M,15M)
- 1.6 ALL CABLE PRODUCTION PROCESS ARE CONTROLLED BY ATC TEST DEVICE.

2. ALL MATERIAL BE RoHS COMPLIANT.

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	DVI-624C
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

DVI(18+5)/M-DVI(18+5)/M

