

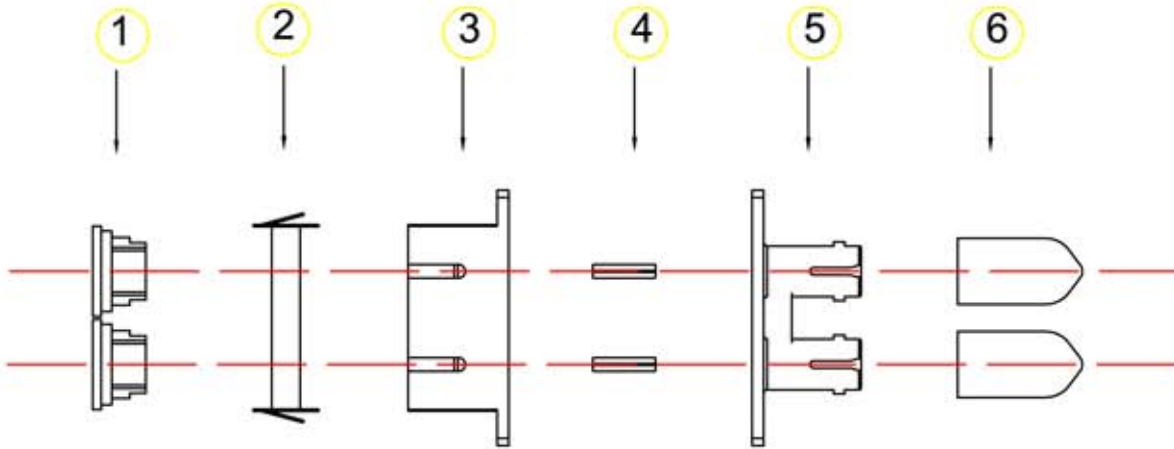


VERSION	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVAL/DATE
1.0	NEW RELEASE			

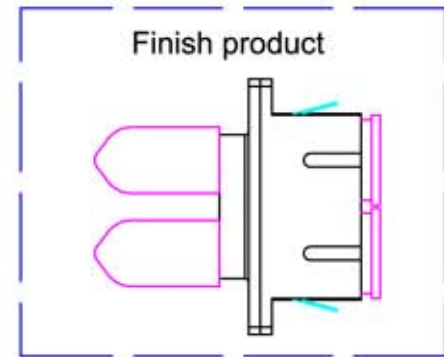

Specifications(@850nm&1300nm):

- 1.Insertion Loss:0.30dB MAX.
- 2.Retention force:300~600grams.
- 3.Durability(500 Matings):0.2dB MAX. Increase.
- 4.Operating temperature:-40°c ~+85°c
- 5.Storage temperature:-40°c ~+85°c
- 6.RoHS Compliant



6		ST Adapter Dust cap	PVC	Black		PCS	2
5		ST Main Body	PBT+30%GF	Beige		PCS	1
4		Sleeve	Ceramic			PCS	2
3		SC Main Body	PBT+30%GF	Beige		PCS	1
2		SC Adapter clip	Metal			PCS	1
1		SC Adapter Dust cap	PVC	Black	g/pc	PCS	2
No.	Partnumber	Specification	Material	Color	Weight	Unit	QTY
Bill Of Material							

UNIT		mm		P/N.		FB-14B		DRAWN BY	
unless otherwise stated Tolerances		mm		MATERIAL		SCALE		Not	
XXX.XX ±0.3		angular ±2°		PAGE		1/1		APPROVAL BY	
XX.XX ±0.2		X.XX ±0.1		TITLE		ST-SC Adapter,MM,Duplex, phosphor bronze, plastic housing		VERSION 1.0	

