


PIN OUT

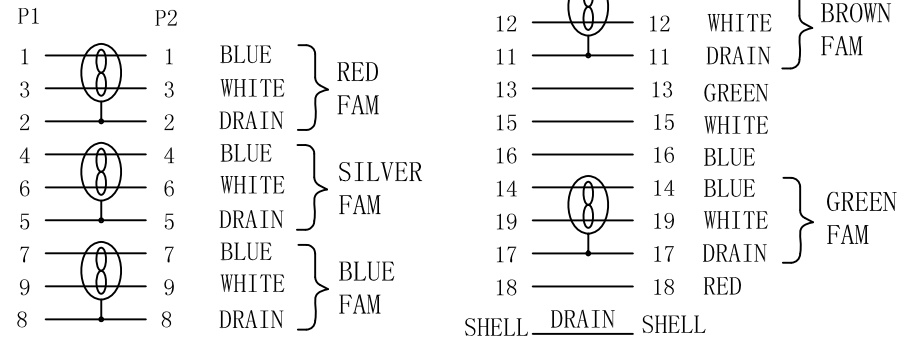

NOTES:

- 1.ELECTRICAL PROPERTIES:
  - 1.1 100% OPEN AND SHORT TEST
  - 1.2 CONDUCTOR RESISTANCE: 5 OHMS
  - 1.3 INSULATION RESISTANCE: 10 MEGOHMS
  - 1.4 HI-POT: DC300V/0.01S
  - 1.5 100% HDTV, BLUE RAY DVD TEST(1080P)
  - 1.6 ALL CABLE PRODUCTION PROCESS ARE CONTROLLED BY ATC TEST DEVICE.
2. ALL MATERIAL BE RoHS COMPLIANT.

NO.	PARTS NAME	Q'TY	SPECIFICATION
⑧	TAG	1PCS	DELTACO TAG
⑦	CORE MOLD	2PCS	WHITE PVC
⑥	CORE	2PCS	OD*ID*L: 12*6.5*20mm
⑤	HOOD MOLD	2PCS	WHITE PVC
④	INNER MOLD	2PCS	PE
③	HDMI 19 C M	1PCS	GOLD PLATED SHELL
②	HDMI 19M	1PCS	GOLD PLATED SHELL
①	CABLE	1PCS	(30AWG*1P+D+FAM)*5+30AWG*4C+AEB OD: 5.5mm±0.2mm WHITE PVC JACKET HIGH SPEED HDMI® CABLE WITH ETHERNET

APPROVED	CHECKED	DRAWN	CUSTOMER:
			ITEM NO. HDMI-1016A
			DRAW NO.
			UNIT mm
			SCALE NONE

DESCRIPTION:

HDMI 19PIN/M-Mini HDMI 19PIN/M

