


PIN OUT

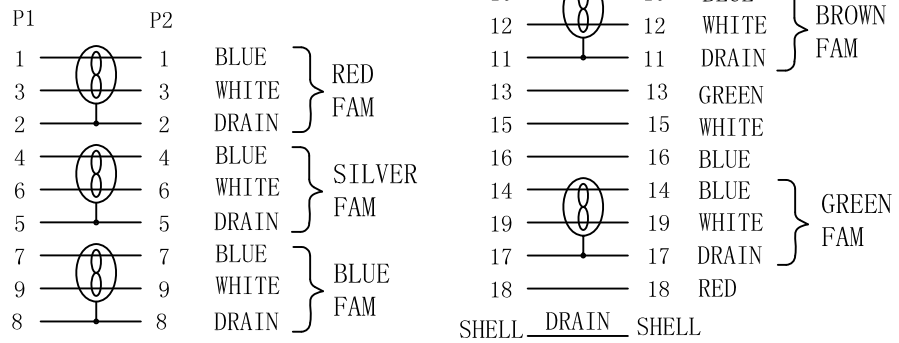

- NOTES:
- 1.ELECTRICAL PROPERTIES:
    - 1.1 100% OPEN AND SHORT TEST
    - 1.2 CONDUCTOR RESISTANCE: 5 OHMS
    - 1.3 INSULATION RESISTANCE: 10 MEGOHMS
    - 1.4 HI-POT: DC300V/0.01S
    - 1.5 100% HDTV, BLUE RAY DVD TEST(1080P)
    - 1.6 ALL CABLE PRODUCTION PROCESS ARE CONTROLLED BY ATC TEST DEVICE.
  2. ALL MATERIAL BE RoHS COMPLIANT.

| NO. | PARTS NAME | Q' TY | SPECIFICATION  |
|-----|------------|-------|--|
| ⑧   | TAG        | 1PCS  | HDMI® HIGH SPEED WITH ETHERNET TAG   |
| ⑦   | TAG        | 1PCS  | DELTACO TAG  |
| ⑥   | CORE MOLD  | 2PCS  | WHITE PVC  |
| ⑤   | CORE       | 2PCS  | OD*ID*L : 12. 6*8. 0*20mm  |
| ④   | HOOD MOLD  | 2PCS  | WHITE PVC  |
| ③   | INNER MOLD | 2PCS  | PE   |
| ②   | HDMI 19M   | 2PCS  | GOLD PLATED SHELL  |
| ①   | CABLE      | 1PCS  | (28AWG*1P+D+FAM)*5+28AWG*4C+AEB OD:7. 3mm±0. 2mm<br>WHITE PVC JACKET<br>HIGH SPEED HDMI® CABLE WITH ETHERNET |

| APPROVED | CHECKED | DRAWN | CUSTOMER:             |
|----------|---------|-------|-----------------------|
|          |         |       | ITEM NO. HDMI-1010A-K |
|          |         |       | DRAW NO.              |
|          |         |       | UNIT mm               |
|          |         |       | SCALE NONE            |

DESCRIPTION:  
HDMI 19PIN/M-HDMI 19PIN/M

