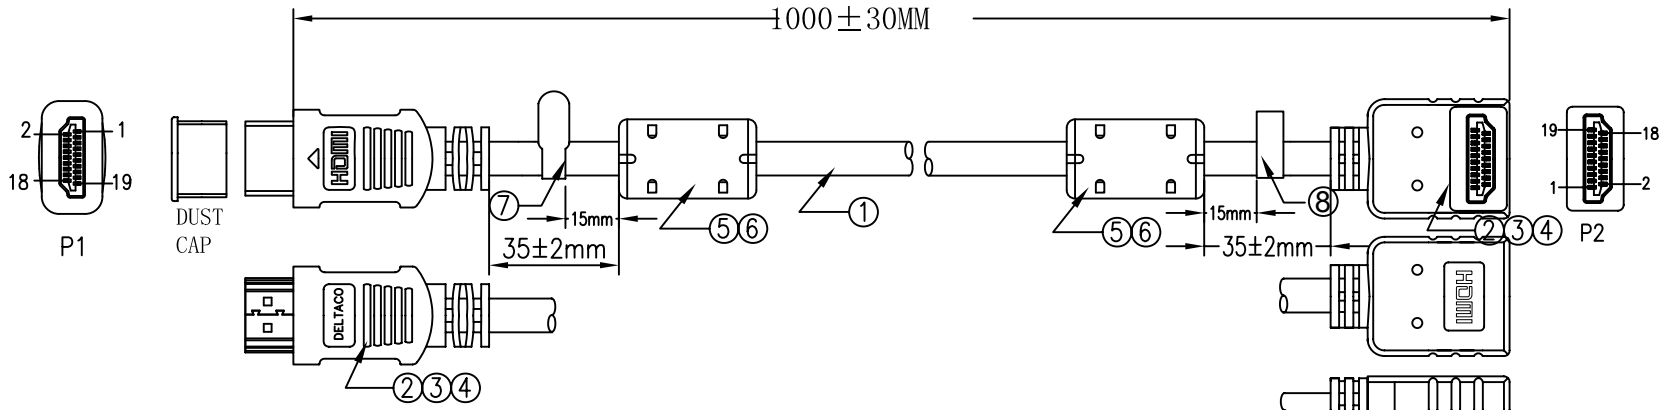


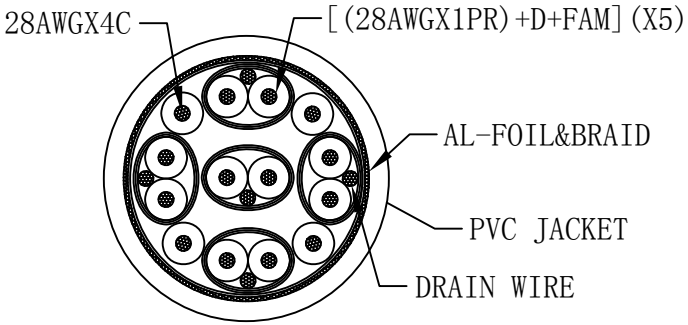


PIN OUT

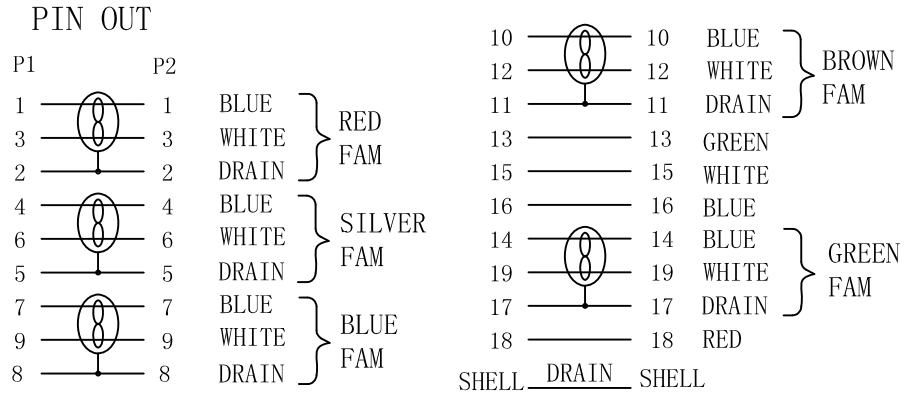


NOTES:

1.ELECTRICAL PROPERTIES:

1.1 100% OPEN AND SHORT TEST

1.2 CONDUCTOR RESISTANCE: 5 OHMS

1.3 INSULATION RESISTANCE: 10 MEGOHMS

1.4 HI-POT: DC300V/0.01S

1.5 100% HDTV, BLUE RAY DVD TEST(1080P)

1.6 ALL CABLE PRODUCTION PROCESS ARE CONTROLED BY ATC TEST DEVICE.

2. ALL MATERIAL BE RoHS COMPLIANT.

| NO. | PARTS NAME | Q' TY | SPECIFICATION |
|---|---|---|---|
| ⑧ | TAG | 1PCS | HDMI® HIGH SPEED WITH ETHERNET TAG |
| ⑦ | TAG | 1PCS | DELTACO TAG |
| ⑥ | CORE MOLD | 2PCS | WHITE PVC |
| ⑤ | CORE | 2PCS | OD*ID*L:14.3*9.0*28.5mm |
| ④ | HOOD MOLD | 2PCS | WHITE PVC |
| ③ | INNER MOLD | 2PCS | PE |
| ② | HDMI 19M | 2PCS | GOLD PLATED SHELL |
| ① | CABLE | 1PCS | (28AWG*1P+D+FAM)*5+28AWG*4C+AEB OD:7.3mm±0.2mm<br>WHITE PVC JACKET<br>HIGH SPEED HDMI® CABLE WITH ETHERNET |

| APPROVED | CHECKED | DRAWN | CUSTOMER: | |
|---|---|---|---|---|
| | | | ITEM NO. | HDMI-1010V |
| | | | DRAW NO. | |
| | | | UNIT | mm |
| | | | SCALE | NONE |

DESCRIPTION:

HDMI 19PIN/M-HDMI 19PIN/M 90°

DELTACO