


PIN OUT

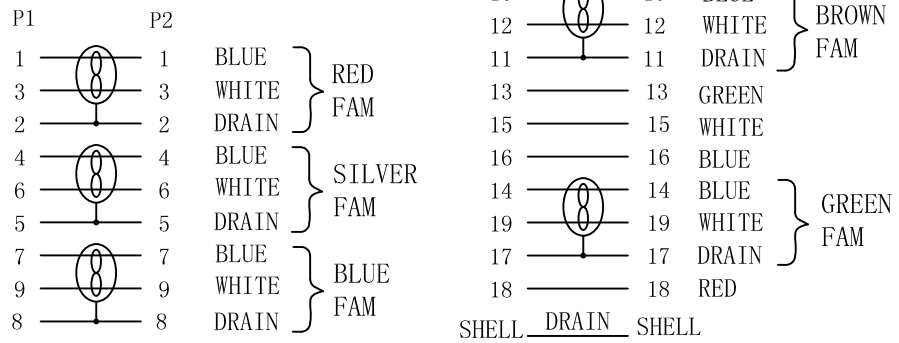

- NOTES:
- 1.ELECTRICAL PROPERTIES:
 - 1.1 100% OPEN AND SHORT TEST
 - 1.2 CONDUCTOR RESISTANCE: 5 OHMS
 - 1.3 INSULATION RESISTANCE: 10 MEGOHMS
 - 1.4 HI-POT: DC300V/0.01S
 - 1.5 100% HDTV, BLUE RAY DVD TEST(1080I)
 - 1.6 ALL CABLE PRODUCTION PROCESS ARE CONTROLLED BY ATC TEST DEVICE.
 2. ALL MATERIAL BE RoHS COMPLIANT.

NO.	PARTS NAME	Q' TY	SPECIFICATION
⑧	TAG	1PCS	HDMI® HIGH SPEED WITH ETHERNET TAG
⑦	TAG	1PCS	DELTACO TAG
⑥	CORE MOLD	2PCS	WHITE PVC
⑤	CORE	2PCS	OD*ID*L: 14. 3*9. 0*28. 5mm
④	HOOD MOLD	2PCS	WHITE PVC
③	INNER MOLD	2PCS	PE
②	HDMI 19M	2PCS	GOLD PLATED SHELL
①	CABLE	1PCS	(28AWG*1P+D+FAM)*5+28AWG*4C+AEB OD: 7. 3mm ± 0. 2mm WHITE PVC JACKET HIGH SPEED HDMI® CABLE WITH ETHERNET

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	HDMI-1060A
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:
HDMI 19PIN/M-HDMI 19PIN/M

