


VERSION	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVAL/DATE
1.0	NEW RELEASE	Lei/2011/05/09	Michael/2011/05/09	Johnson/2011/05/09

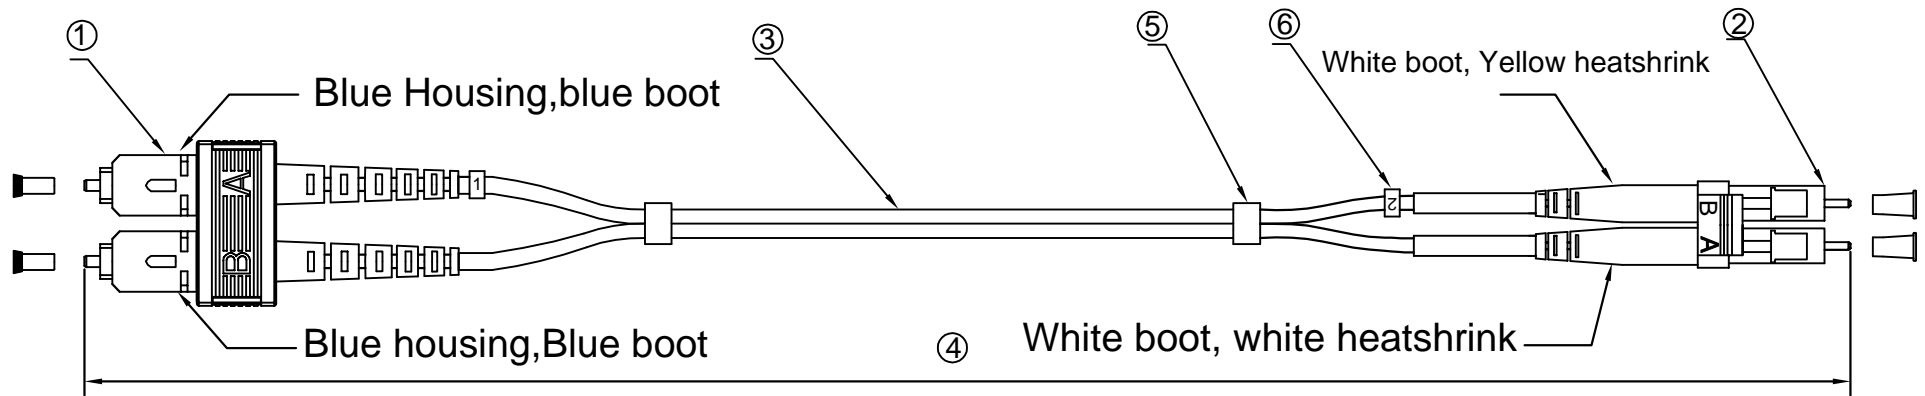

**Specification:**

- 1.Connector Type: SC/PC singlemode
- 2.Connector Type: LC/PC singlemode
- 3.Cable Type:  
Zipcord cable,  $\phi$  1.8mm. 9/125um , singlemode,  
Cable Jacket : Yellow color, LSZH material
- 4.Length : xM
- 5.Shrink Tube
- 6. Cable Marker

Part Number	Length
LCSC-1S	1M
LCSC-2S	2M
LCSC-3S	3M
LCSC-5S	5M
LCSC-10S	10M
LCSC-15S	15M
LCSC-20S	20M
LCSC-xxS	xxM

**Performance:**

- a. Insertion Loss :<0.3 dB
- b.Return loss > 50 dB
- c. Ferrule End-face Radius :  $10 < R < 30$ mm
- d. Apex Offset: < 50um
- e. Increase in insertion loss after 500 mating:0.2 dB Max.
- f. Operation Temperature :-20° to +70°
- g. Storage Temperature :-40° to +80°

UNIT		TITLE	VERSION	
mm		DELTA CO Fiberkablage LC - SC, duplex, singlemode,XXmeters	1.0	
unless otherwise stated		P/N.	DRAWN BY	
Tolerances		MATERIAL	CHECK BY	
mm $\pm 0.3$		SCALE	PAGE	APPROVAL BY
angular $\pm 2^\circ$			1/1	Johnson
XXX.XX $\pm 0.3$				
XX.XX $\pm 0.2$				
X.XX $\pm 0.1$				