


ZAVIO P4520 5MP Panoramic Fisheye IP Camera



- 180° /360° Fisheye Mini Dome
- H.265, 50% lower bitrate
- 1/1.8" 5MP CMOS sensor
- WDR

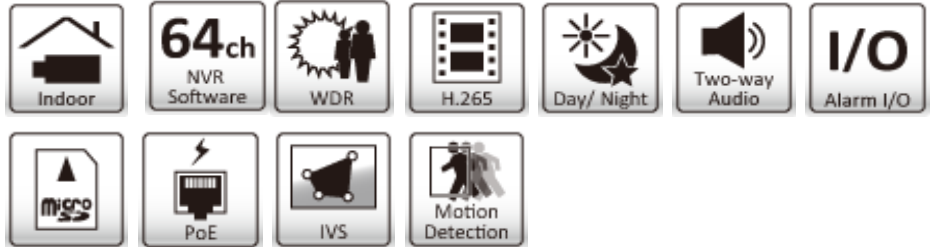

The P4520 is a compact, yet powerful fisheye dome camera featuring many cutting-edge technologies. The high resolution fisheye lens provides 360° surround view with image detail even at the normally weak edges; the huge 1/1.8" 5-Megapixel image sensor ensures superior low light sensitivity; our advanced fisheye dewarping algorithms keep distortion lower than others while putting less computing loading on the server; and last but not least, video can be streamed in the ultra-efficient H.265 format, which has up to 50% lower bitrates and cuts your bandwidth and storage requirements in half.

It also features a removable IR-cut filter, MicroSD/SDHC/SDXC edge storage, PoE, two-way audio and alarm input/output, making it a extremely versatile camera with maximum coverage.


Related models

Model Name	P4320
Feature	180° /360° Fisheye Mini Dome
	3MP
	H.265
	WDR
	PoE

Features

- 1/1.8" CMOS sensor
- H.265, H.264, and Motion JPEG compression
- 30fps @ 2560 x 1920
- 1.49mm, F2.0 fisheye lens
- WDR
- True day & night with automatic removable IR-cut filter
- Two-way audio and built-in microphone
- 1 x alarm input, 1 x alarm output
- Edge storage
- RTC with built-in battery
- SSL v3 advanced HTTPS encryption
- Supports Samba network storage
- Multi-lingual user interface
- ONVIF 2.4 and Profile S compliant
- Free 64-channel ZAVIO CamGraba 2.0 NVR software

WDR

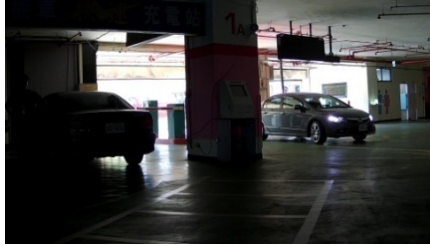

WDR off



WDR on

Applications



1. Office
2. Public Area

IP Surveillance Solutions

• Free 64ch NVR Software

The most professional NVR software you can get for free!

- Support up to 64 channels
- Up to 128 channels remote live view
- Remote playback 16 channels
- Multi-site / multi-server
- Transcoding (record high quality, transcode to different resolution / frame rate for remote client to save bandwidth)
- iOS/ Android mobile client (multi-channel live view | playback | PTZ & I/O control)
- E-maps (up to 4 layers | unlimited number of maps | video preview)
- Dual monitor
- ePTZ
- Multi-lingual user interface



• ONVIF

All IP cameras are ONVIF 2.x & Profile S compliant, and continuously upgraded to comply with the latest versions



• NVR Recorders

The most cost-efficient way to professionally view, record and manage up to 32

- Full HD cameras
- Up to 32 channels
- Up to 4HDDs or 16TB of storage
- Up to 160Mbps recording throughput
- Free CMS up to 128 channels remote live view
- Free P2P service, no more router settings
- One click setup
- HDMI, VGA dual video output
- RAID 0,1
- Supports 3rd party cameras
- Supports POS (Point-of-sale)
- Small and lightweight



ZAVIO P4520 5MP Panoramic Fisheye IP Camera

Camera		General	
Model	P4520 5MP Panoramic Fisheye IP Camera	Casing	Aluminum casing
Image sensor	1/1.8" megapixel CMOS sensor	Power	DC 12V or PoE IEEE 802.3af class 1
Lens	F2.0, 1.49mm		Power consumption: Max 4.65W
Angle of view	180° horizontal 160° vertical	Operating conditions	-10 ~ 50 °C (14 ~ 122 °F)
Min illumination	0.05 lux @ F2.0 (color) 0.001 lux @ F2.0 (B/W)	Installation, management, and maintenance	ZAVIO camera management tool on CD and web-based configuration. Configuration of backup and restore firmware upgrades over HTTP, firmware available at www.zavio.com
Day/Night function	Mechanical IR cut filter	Minimum web browsing requirement	Pentium 4 2.8GHz (or equivalent AMD) 256MB RAM graphic cards (or equivalent on-board graphic cards) 1G RAM Windows XP, Vista, or Windows / Mac OS Leopard 10.5 or later Mac OS Leopard 10.5 or later
Video		Dimensions	φ115 x 54mm (φ4.53" x 2.13")
Video compression	H.264 baseline/ main profile/ high profile H.265	Weight	240g (0.53lb)
Resolutions	5MP Mode 2 profiles from 2560 x 1920 to 640 x 360 2 profiles from 640 x 480 to 640 x 360 2MP Mode 2 profiles from 1080 x 720 to 640 x 360 2 profiles from 640 x 480 to 640 x 360	Included accessories	Quick installation guide, CD (Camera Installation Tool, Video Management Tool, User Manuals, Camera Language Packs) mounting and connector kits
Frame rate	H.264/ H.265: up to 60 fps at 2MP Mode up to 30 fps at 5MP Mode	Certification	CE, FCC
Video streaming	Simultaneous H.264, H.265 Controllable frame rate and bandwidth Support unicast (Real Time Streaming Protocol)	Integration	
Image settings	Rotation: mirror, flip, mirror flip WDR Brightness, contrast, saturation, sharpness Overlay capabilities: time, date, text and privacy Image ROI Defog	Video management software	ZAVIO CamGraba IP System software, for viewing, recording and archiving up to 64 cameras See http://www.zavio.com/softwaredownloads.php for more software application
Audio		Part Names and Functions	
Audio streaming	Two-way (full duplex)		
Audio compression	G.711 μ law, a law, AMR Line input and line output	Dimensions	
Network			
Security	Multiple user access levels with password protection, HTTPS encryption Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP		
Users	users		
Alarm and Event Support			
Alarm and event management	Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer		
System			
	RJ-45 Ethernet 10/ 100/ 1000 Base-T (PoE), Reset button 2pin terminal block for DC power 6pin cable for 1 alarm input, 1 output, 1 audio line in 1 audio line out		
Local storage	MicroSD Card slot Power status indicator Network link indicator		
Software integration	ONVIF 2.4 & Profile S		
Video management software	Camera Installation Tool & Video Management Software - ZAVIO CamGraba2.0 for viewing recording and archiving up to 64 cameras		



ZAVIO Inc. | 2F., No.13, Yanfa 2nd Rd., East Dist., Hsinchu City 300, Taiwan
www.zavio.com | TEL: 886-3-579-0275 | FAX: 886-3-668-6845 | E-Mail: sales@zavio.com