


| PIN OUT |     |                   |              |
|---------|-----|-------------------|--------------|
| CN1     |     | CN2               | COLOR        |
| 1       | —○— | 1                 | WHITE/ORANGE |
| 2       | —○— | 2                 | ORANGE       |
| 3       | —○— | 3                 | WHITE/GREEN  |
| 6       | —○— | 6                 | GREEN        |
| 4       | —○— | 4                 | BLUE         |
| 5       | —○— | 5                 | WHITE/BLUE   |
| 7       | —○— | 7                 | WHITE/BROWN  |
| 8       | —○— | 8                 | BROWN        |
| SHIELD  | —   | SHIELD DRAIN WIRE |              |

PAIR

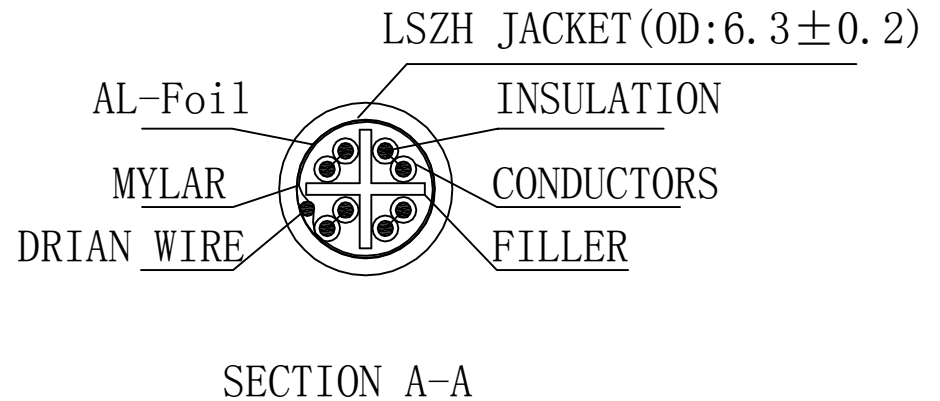

| ③   | MOLDING    | 2PCS  | ORANGE PVC   |
|-----|------------|-------|--|
| ②   | CONNECTER  | 2PCS  | RJ45 (8P8C) MALE WITH METAL SHIELD (NICKEL PLATED), GOLD PLATED PINS |
| ①   | CABLE      | 1PCS  | 26AWG*4P+FILLER+MYLAR+DRAIN WIRE+AL-FOIL +ORANGE LSZH JACKET         |
| NO. | PARTS NAME | Q' TY | SPECIFICATION  |

- 1.1 ALL COMPONENTS ARE RoHS COMPLIANT.
- 1.2 100% OPEN AND SHORT TEST.
- 1.3 ALL PRODUCTS PASS TIA CAT 6 CHANNEL TEST
- 1.4 TEMPERATURE RANGE: -20—+60°C

| APPROVED | CHECKED | DRAWN | CUSTOMER: |            |
|----------|---------|-------|-----------|------------|
|          |         |       | ITEM NO.  | STP-615-OR |
|          |         |       | DRAW NO.  |            |
|          |         |       | UNIT      | mm         |
|          |         |       | SCALE     | NONE       |

DESCRIPTION:  
RJ45 (8P8C) M/M, FTP, CAT6 15m

