
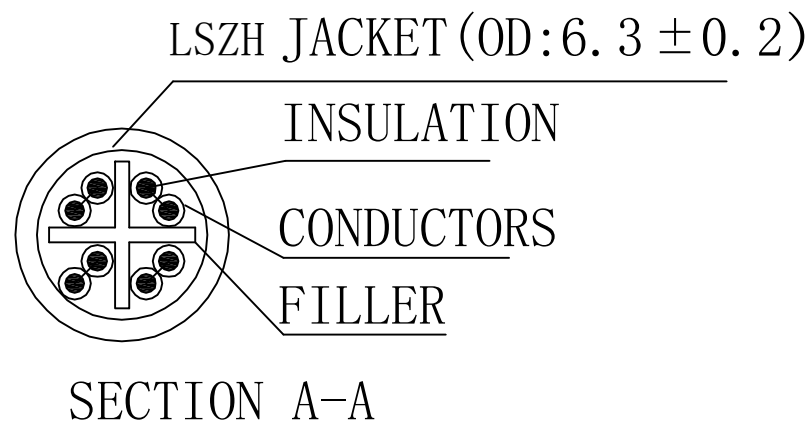


PIN OUT

| CN1 | | CN2 | COLOR |
|-----|-----|-----|--------------|
| 1 | —○— | 1 | WHITE/ORANGE |
| 2 | —○— | 2 | ORANGE |
| 3 | —○— | 3 | WHITE/GREEN |
| 6 | —○— | 6 | GREEN |
| 4 | —○— | 4 | BLUE |
| 5 | —○— | 5 | WHITE/BLUE |
| 7 | —○— | 7 | WHITE/BROWN |
| 8 | —○— | 8 | BROWN |



1. 1 ALL COMPONENTS ARE RoHS COMPLIANT.
1. 2 100% OPEN AND SHORT TEST.
1. 3 ALL PRODUCTS PASS TIA CAT 6A CHANNEL TEST
1. 4 TEMPERATURE RANGE: -20—+60°C

| ③ | MOLDING | 2PCS | GREY PVC |
|-----|------------|-------|------------------------------------|
| ② | CONNECTER | 2PCS | RJ45 (8P8C) MALE, GOLD PLATED PINS |
| ① | CABLE | 1PCS | 24AWG*4P+FILLER+GREY LSZH JACKET |
| NO. | PARTS NAME | Q' TY | SPECIFICATION |

| APPROVED | CHECKED | DRAWN | CUSTOMER: | |
|----------|---------|-------|-----------|----------|
| | | | ITEM NO. | TP-625AU |
| | | | DRAW NO. | |
| | | | UNIT | mm |
| | | | SCALE | NONE |

DESCRIPTION:
RJ45 (8P8C) M/M, UTP, CAT6A, 25m

