


PIN OUT

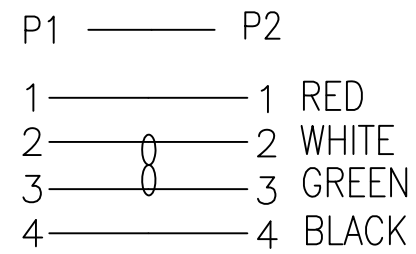

SHELL ——— SHELL(BRAID+DRAIN)

- NOTES:
 1. TESTING: 100% OPEN AND SHORT AND MISS WIRE TEST.
 2. ALL MATERIAL ARE ROHS COMPLIANT.

⑦	CORE	2PCS	BLACK PVC OD*L: 16.7*27.7mm
⑥	TAG	1PCS	DELTACO TAG
⑤	HOOD MOLD	2PCS	BLACK PVC
④	INNER MOLD	1PCS	PE
③	USB A F	1PCS	NICKEL PLATED SHELL
②	USB A M	1PCS	NICKEL PLATED SHELL
①	CABLE	1PCS	(26AWG*1P)+22AWG*2C+AEB OD:5.0mm BLACK PVC JACKET
NO.	PARTS NAME	Q'TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	USB2-14FS
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:
 USB A/M-USB A/F

