

DiskStation DS218



Synology DiskStation DS218 is a high-performance and versatile 2-bay NAS designed for small offices and home users to effectively manage, protect, and share data. Its 64-bit quad-core processor delivers high-speed data transmission and 10-bit 4K H.265 video transcoding to empower shared data storage and multimedia entertainment. Synology DS218 is backed by Synology's 2-year limited warranty.

Optimal Price-Performance Ratio

Synology DS218 is a 2-bay network attached storage solution equipped with a **64-bit quad-core processor** and **2GB memory**, providing high sequential throughput performance at over **112 MB/s reading** and **112 MB/s writing**¹. With **hardware accelerated encryption**, DS218 delivers encrypted sequential throughput at over **112 MB/s reading** and **111 MB/s writing**¹.

DS218 is also optimized for **10-bit 4K H.265 video transcoding** via **Video Station**. You can organize personal digital video library with comprehensive media information, and stream 4K Ultra HD movies and films to various devices such as computers, smartphones, media players, and TVs. If your device is not capable of 4K video playback, DS218 provides online 4K video transcoding to 1080p or lower resolutions for smoother and time-saving video watching experience.

Cross-Platform File Sharing and Data Synchronization

DS218 supports comprehensive network protocols, ensuring a seamless file sharing experience across Windows®, Mac®, and Linux® platforms. **Windows AD** and **LDAP** integration allows DS218 to fit quickly and effortlessly into any existing network environment without the need to repeatedly create user accounts. **Cloud Sync** keeps your Dropbox, Google™ Drive, Microsoft OneDrive, Baidu, and Box storages in sync with your personal DiskStation at home. **Cloud Station Suite** allows you to sync files effortlessly among multiple devices — Windows PC, Mac, Linux, iOS or Android™ tablets/phones — keeping everything up-to-date. DS218 combines seamless file sharing capability with hardened security, even over the Internet with HTTPS, built-in firewall, and multiple auto-blocking mechanisms against IP and account intrusion.

Highlights

- Versatile 2-bay NAS for small offices and home users
- 64-bit quad-core processor delivering sequential throughput at over 112 MB/s reading and 112 MB/s writing¹
- 2 GB DDR4 memory, 4 times the capacity than its predecessor
- 4K 10-bit H.265 video transcoding on the fly²
- Running on Synology DiskStation Manager (DSM)

Easy Backup Solutions

With block-level incremental backup and cross-version deduplication, Synology **Hyper Backup** provides multi-version backup with optimized storage utilization, and allows data backup to multiple destinations, such as local shared folders, external hard drives, network shared folders, rsync servers, and public cloud services.

Anywhere/Anytime Availability

Synology provides various mobile applications allowing you to enjoy your multimedia library even when on the go. Available on iOS, Android™, and Windows Phone® platforms, **DS photo**, **DS audio**, **DS video**, and **DS file** enable access to your Synology NAS through **Photo Station**, **Audio Station**, **Video Station**, and **File Station**. What's more, you can use **DS get** to remotely manage and monitor download tasks on **Download Station**.

QuickConnect allows you to connect via a simple customizable address so that you can instantly access media and work files on any Windows/Mac/Linux computer, laptop, or mobile device.

24/7 Security Solution

Featuring user-friendly video management tools and an intuitive desktop-like interface, Synology **Surveillance Station** is a reliable private-security solution that can support multiple IP cameras connected to the same network with DS218. Surveillance Station features optimized live view together with streamlined real-time monitoring. Its powerful analytics, such as motion detection and alert notification, allow you to stay informed of any suspicious activities with triggers sent via SMS, e-mail, and DS cam mobile application.

Energy-Efficient and Easy Management

Synology DS218 is designed and developed with energy efficiency in mind. DS218 consumes only **14.99 W** in regular operation. Wake on LAN/WAN and scheduled power on/off can further reduce power consumption and operational costs. With HDD hibernation, hard drives can enter the energy-saving mode automatically when the system has been idle for a specified period of time.



Cross-platform File Synchronization

Synology DS218 can serve as a centralized backup destination, allowing you to synchronize files from multiple devices via Cloud Station Suite.




Anytime Availability


Access your DiskStation anywhere using Synology mobile apps.

Hardware Overview

Front

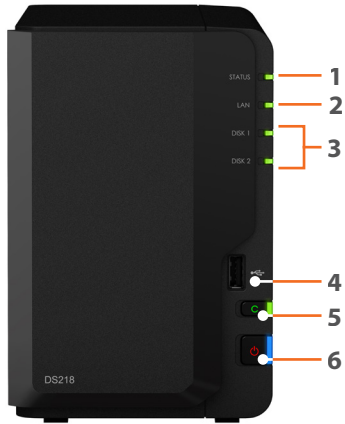

Rear

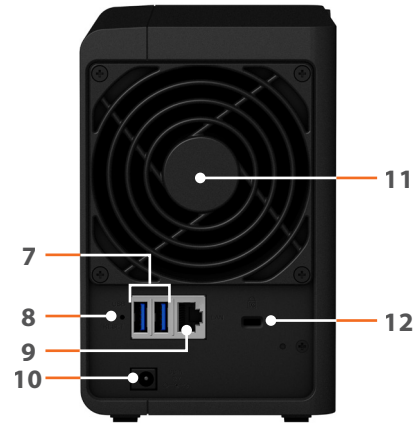

| | | | | | | | |
|---|------------------|----|----------------------------|----|------------------------|----|--------------------------|
| 1 | Status indicator | 2 | LAN indicator | 3 | Drive status indicator | 4 | USB 2.0 port |
| 5 | USB copy button | 6 | Power button and indicator | 7 | USB 3.0 port | 8 | Reset button |
| 9 | 1GbE RJ-45 port | 10 | Power port | 11 | Fan | 12 | Kensington Security Slot |

Technical Specifications

Hardware

| | |
|--|--|
| CPU | Realtek RTD1296 quad-core 1.4GHz |
| Hardware encryption engine | Yes |
| Hardware transcoding engine ² | <ul style="list-style-type: none"> Supported codec: MPEG-4 Part 2 (XVID, DIVX5), MPEG-2, VC-1, 10-bit H.265 (HEVC) Maximum resolution: 4K (4096 x 2160) Maximum frames per second (FPS): 60 |
| Memory | 2 GB DDR4 |
| Compatible drive type | 2 x 3.5" or 2.5" SATA SSD/HDD (drives not included) |
| External port | <ul style="list-style-type: none"> 1 x USB 2.0 port 2 x USB 3.0 port |
| Size (HxWxD) | 165 x 108 x 233.2 mm |
| Weight | 1.3 kg |
| LAN | 1 x 1GbE (RJ-45) |
| Wake on LAN/WAN | Yes |
| Scheduled power on/off | Yes |
| System fan | 1 (92 x 92 x 25 mm) |
| AC input power voltage | 100V to 240V AC |
| Power frequency | 50/60Hz, single phase |
| Operating temperature | 0°C to 40°C (32°F to 104°F) |
| Storage temperature | -20°C to 60°C (-5°F to 140°F) |
| Relative humidity | 5% to 95% RH |
| Maximum operating altitude | 5,000 m (16,400 ft) |

General DSM Specification

| | |
|-------------------------|--|
| Networking protocol | SMB, AFP, NFS, FTP, WebDAV, CalDAV, iSCSI, Telnet, SSH, SNMP, VPN (PPTP, OpenVPN™, L2TP) |
| File system | <ul style="list-style-type: none">Internal: ext4External: ext4, ext3, FAT, NTFS, HFS+, exFAT³ |
| Supported RAID type | Synology Hybrid RAID (SHR), Basic, JBOD, RAID 0, RAID 1 |
| Storage management | <ul style="list-style-type: none">Maximum internal volumes: 256Maximum iSCSI targets: 10Maximum iSCSI LUNs: 10 |
| File sharing capability | <ul style="list-style-type: none">Maximum local user accounts: 2,048Maximum local groups: 256Maximum shared folders: 256Maximum concurrent SMB/NFS/AFP/FTP connections: 200 |
| Privilege | Windows Access Control List (ACL), application privilege |
| Directory service | Windows® AD integration: Domain users login via SMB/NFS/AFP/FTP/File Station, LDAP integration |
| Security | Firewall, encrypted shared folder, SMB encryption, FTP over SSL/TLS, SFTP, rsync over SSH, login auto block, Let's Encrypt support, HTTPS (Customizable cipher suite) |
| Supported client | Windows 7 and 10, Mac OS X® 10.11 onwards |
| Supported browser | Chrome®, Firefox®, Internet Explorer® 10 onwards, Safari® 10 onwards; Safari (iOS 10 onwards), Chrome (Android™ 6.0 onwards) |
| Interface Language | English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svensk, Nederlands, Русский, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, Český, 日本語, 한국어, 繁體中文, 简体中文 |

Packages and Applications

| | |
|-----------------------------|--|
| File Station | Virtual drive, remote folder, Windows ACL editor, compressing/extracting archived files, bandwidth control for specific users or groups, creating sharing links, transfer logs |
| FTP Server | Bandwidth control for TCP connections, custom FTP passive port range, anonymous FTP, FTP SSL/TLS and SFTP protocol, boot over the network with TFTP and PXE support, transfer logs |
| Universal Search | Offer global search into applications and files |
| Hyper Backup | Support local backup, network backup, and backup data to public clouds |
| Backup tools | DSM configuration backup, macOS Time Machine support, Cloud Station Backup Shared folder sync - maximum tasks: 2 |
| Cloud Station Suite | Sync data between multiple platforms by installing the client utilities on Windows, Mac, Linux, Android and iOS devices, while retaining up to 32 historical versions of files Maximum concurrent file transfers: 200 |
| Cloud Sync | One or two-way synchronization with public cloud storage providers including Amazon Drive, Amazon S3-compatible storage, Baidu cloud, Box, Dropbox, Google Cloud Storage, Google Drive, hubiC, MegaDisk, Microsoft OneDrive, OpenStack Swift-compatible storage, WebDAV servers, Yandex Disk |
| Surveillance Station | Maximum IP cameras: 20 (total of 600 FPS at 720p, H.264) (includes two free camera licenses; additional cameras require the purchasing of additional licenses) |
| VPN Server | Maximum connections: 5, supported VPN protocol: PPTP, OpenVPN™, L2TP/IPSec |
| Mail Server | Supported Mail Server protocol: POP3, SMTP, IMAP, support LDAP/AD account |
| Mail Station | Webmail interface for Mail Server to receive emails from multiple POP3 mailboxes, customizable SMTP server |
| Collaboration tools | <ul style="list-style-type: none">Chat maximum users: 500Office maximum users: 100, maximum simultaneous editing users: 30Calendar: support CalDAV and access via mobile devices |
| Note Station | Rich-text note organization and versioning, encryption, sharing, media embedding and attachments |
| Storage Analyzer | Volume and quota usage, total size of files, volume usage and trends based on past usage, size of shared folders, largest/most/least frequently modified files |
| Antivirus Essential | Full system scan, scheduled scan, white list customization, virus definition auto update |
| Download Station | Supported Download Protocols: BT, HTTP, FTP, NZB, eMule, Thunder, FlashGet, QQDL Maximum concurrent download tasks: 30 |
| Web Station | Virtual host (up to 30 websites), PHP/MariaDB®, 3rd-party applications support |
| Other packages | Video Station, Photo Station, Audio Station, DNS Server, RADIUS Server, iTunes® Server, Log Center, additional 3rd-party packages are available on Package Center |
| iOS/Android™ applications | DS audio, DS cam, DS cloud, DS file, DS finder, DS get, DS note, DS photo, DS video |
| Windows Phone® applications | DS audio, DS file, DS finder, DS get, DS photo, DS video |

Environment and Packaging

| | |
|----------------------|--|
| Environment safety | RoHS compliant |
| Package content | <ul style="list-style-type: none">• DS218 main unit x 1• Quick Installation Guide x 1• Accessory pack x 1• AC power adapter x 1• RJ-45 LAN cable x 1 |
| Optional accessories | <ul style="list-style-type: none">• VisualStation VS360HD, VS960HD• Surveillance Device License Pack |
| Warranty | 2 years |

*Model specifications are subject to change without notice. Please refer to www.synology.com for the latest information.

1. Performance figures may vary depending on environment, usage, and configuration.
2. DS218 can transcode 4K video to 1080p or lower. The maximum number of concurrent video transcoding channels supported may vary depending on the video codec, resolution, bitrate and FPS.
3. exFAT Access is purchased separately in Package Center.

SYNOLOGY INC.

Synology is dedicated to taking full advantage of the latest technologies to bring businesses and home users reliable and affordable ways to centralize data storage, simplify data backup, share and sync files across different platforms, and access data on-the-go. Synology aims to deliver products with forward-thinking features and the best in class customer services.

Copyright © 2017, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice.

DS218-2017-ENU-REV002

Headquarters

Synology Inc. 3F-3, No. 106, Chang An W. Rd., Taipei, Taiwan Tel: +886 2 2552 1814 Fax: +886 2 2552 1824

| | | | | |
|---|---|---|---|--|
| China Synology Shanghai 200070, Room 516, No. 638 Hengfeng Rd., Zhabei Dist. Shanghai, China | France Synology France SARL 39 rue Louis Blanc, 92400 Courbevoie, France Tel: +33 147 176288 | North & South America Synology America Corp. 3535 Factoria Blvd SE #200 Bellevue, WA 98006, USA Tel: +1 425 818 1587 | United Kingdom Synology UK Ltd. Unit 5 Danbury Court, Linford Wood, Milton Keynes, MK14 6PL, United Kingdom Tel: +44 190 804 8029 | Germany Synology GmbH Grafenberger Allee 125 40237 Düsseldorf Deutschland Tel: +49 211 9666 9666 |
|---|---|---|---|--|