

# ZYXEL



## WAC6303D-S

### 802.11ac Wave 2 Dual-Radio Unified Pro Access Point

Networking administrators managing busy venues such as airports, exhibition centers or shopping malls must understand how visitors longed for WiFi and how challenging it is to meet the demands within limited budgets. The Zyxel WAC6303D-S 802.11ac Wave 2 Dual-Radio Unified Pro Access Point delivers superior wireless experience in high-density areas at an affordable price. Powered by 3x3 MU-MIMO that provides triple performance and Zyxel smart antenna technology with the proven ability to mitigate co-channel interferences, the WAC6303D-S not only resolves the challenge today but also guarantees future-proof scalability for the ever-growing mobility demands.

#### Benefits

##### Second Generation MU-MIMO – the true breakthrough in wireless connectivity

Stepping up from 802.11ac, the Wave 2 technology introduces Multi-User MIMO (MU-MIMO). This is an important WiFi development that enables an AP to communicate with multiple clients at a time offering up to 300% performance for a 3x3 AP. The benefits of Wave 2 technology are clear, but there are still two well-known technical challenges: the airtime cost when performing channel measurement, and the data rate being limited by the slowest client in the MU group.

To overcome those challenges, the WAC6303D-S uses next generation transmit beamforming technology incorporating Low End Sensitivity Improvements and Time Domain Channel Smoothing allowing data rates to increase for not only MU-MIMO clients, but for all existing ones as well. Additionally, the WAC6303D-S is built with Smart antenna, premium power amplifiers and low-noise elements delivering superior wireless performance over other Wave 2 access points on the market.

Datasheet [WAC6303D-S](#)



Excellent wireless coverage and performance with the latest 3x3 Wave 2 802.11ac technology



Smart antenna technology and next generation beamforming deliver maximum coverage



Innovative MU-MIMO technology increases downstream throughput by simultaneously talking to multiple devices at the same time



Simple installation with APFlex™ or Zyxel Utility makes installation and setup a breeze whether for just single or multiple units at once



Solid state capacitors and advanced heat dissipation ensure high reliability and long life—even in the toughest environments



Advanced Cellular Coexistence minimizes interference from 3G/4G cellular networks



Zyxel **one** network  
Redefining network integration

## Unbeatable coverage

Maximizing wireless coverage is more than just a game of output power. Every hardware design details including the layout, the antenna and the ability to distinguish between numerous sources of noise all contribute in determining coverage and throughput. The Zyxel WAC6303D-S features Smart antenna technology with the proven ability to mitigate co-channel interference, and adaptively adjust antenna patterns to fit high-density applications. Unlike most products on the market that measure only conducted sensitivity without considering the effect of antennas, Zyxel examines sensitivity with antenna (a.k.a. OTA sensitivity) as a whole wireless system to minimize the degradation in sensitivity at receiver end. In short, Zyxel has optimized the design of the WAC6303D-S to boost sensitivity and maximize real world performance.

## ThermoSense Adjustment Technology

Zyxel's ThermoSense Adjustment Technology is an innovative feature that extends the operating temperature range to as high as to 60°C. It does this by monitoring the temperature threshold intelligently and making adjustments to operating parameters. This ensures continued performance in extreme environments such as warehouses and factory floors.

## 3G/4G Cellular Network Coexistence

With gradually pervasive 3G infrastructure deployment at customer sites, users start to experience wireless performance degrade e.g. ping drops and high latency, however whenever users shutdown the 3G equipment, wireless service resumes working smooth. To enable 3G/4G cellular network coexistence and minimize interference from 3G/4G antennas or signal boosters, the WAC6303D-S has built-in 3G/4G interference filters. As a result, installation of the AP no longer needs to worry about the visible or invisible 3G/4G indoor antennas around.

## BLE Beacons gain insight into your consumers

The Zyxel WAC6303D-S is an efficient WLAN solution for high-density deployments and it gives customers a future-proof BLE beacon-enabled network. It cooperates with third-party beacon management platforms to boost user engagement, especially for retailers who want to improve the in-store experience. With the most accurate indoor location technology, retailers can navigate customers to in-store events or push in-time coupon to passersby carrying beacon-compatible devices.

## Zyxel One Network experience

Aimed at minimizing the repetitive task of deploying and managing networks, Zyxel One Network (ZON) simplifies configuration, management and troubleshooting of multiple AP and switch deployments. This enables users to focus on their other key business priorities. The Zyxel One Network incorporates Zyxel One Network Utility (ZON Utility), an easy-to-use tool designed for instant network setup and Zyxel Smart Connect, which allows Zyxel networking equipment to find and recognize each other automatically. Zyxel One Network further facilitates remote network maintenance with one-click functions, and works across multiple networking products from Switch to Wireless to Gateway.


## Optimized wireless experience with advanced features

The WAC6303D-S ensures an optimized wireless experience for users with a range of wireless features such as Dynamic Channel Selection (DCS), Load Balancing and Smart Client Steering. DCS minimizes the interference of co-channel and overlapping channels. Load Balancing enables administrators to set limits on the number of clients associated with each AP. Furthermore, Smart Client Steering features with Band Select, Signal Threshold and Band Balancing combine to deliver stable, reliable wireless connections. Band Select and Signal Threshold monitor the capabilities of each wireless client and steer them to the less-congested band and AP with better signals. Band Balancing detects dual-radio clients and distributes clients across 2.4 GHz and 5 GHz bands on AP. All of these deliver a smooth, consistent and uninterrupted wireless experience to its users.


## Grow your business with a scalable wireless network

The WAC6303D-S can be configured as a fully functional standalone AP. However, it is also capable of working with a Wireless LAN Controller to form a robust controller-based WLAN solution with centralized management as WiFi demand grows. Thanks to the innovative AP Flex technology, no manually configuration is required to choose between standalone or controller mode; the WAC6303D-S will automatically put itself into managed mode if a compatible wireless controller is found on the network. Using industry standard CAPWAP technology ensures secure and reliable communication between the controller and AP, even if the controller is located off-site.

## Powerful Hardware Design

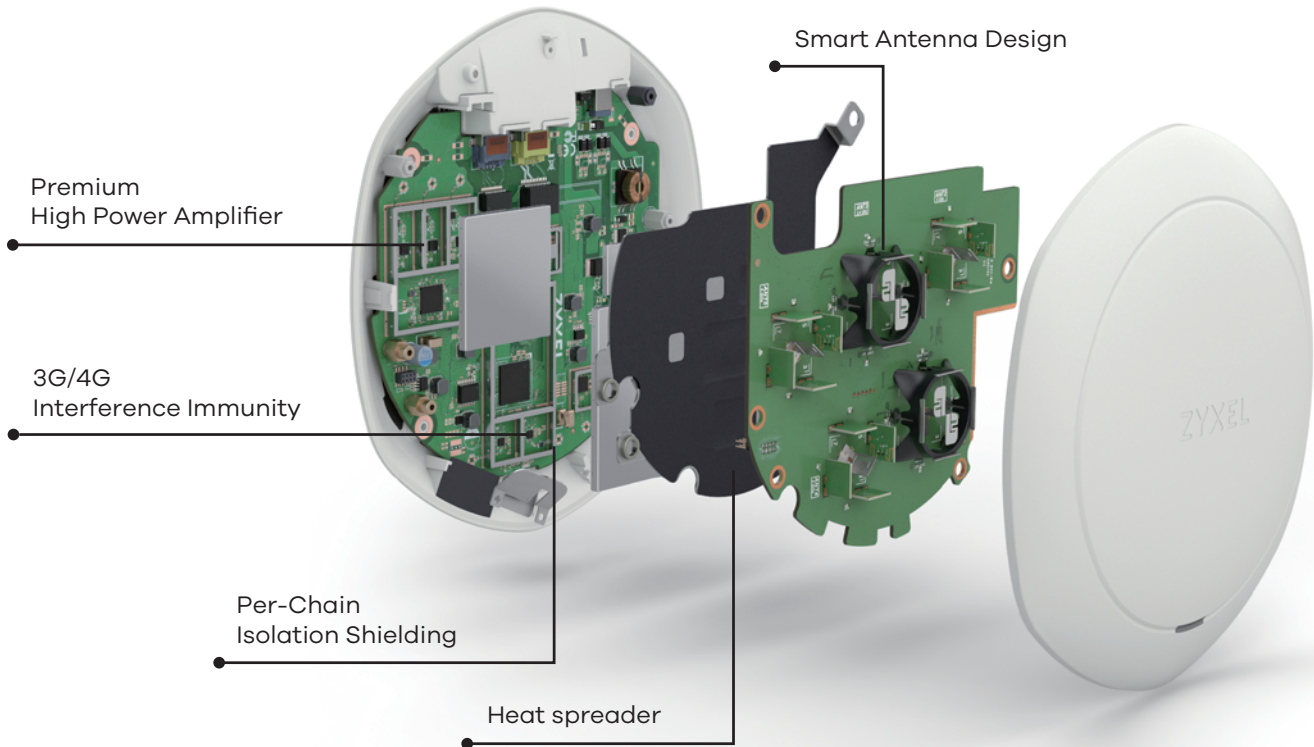


## Application Diagram

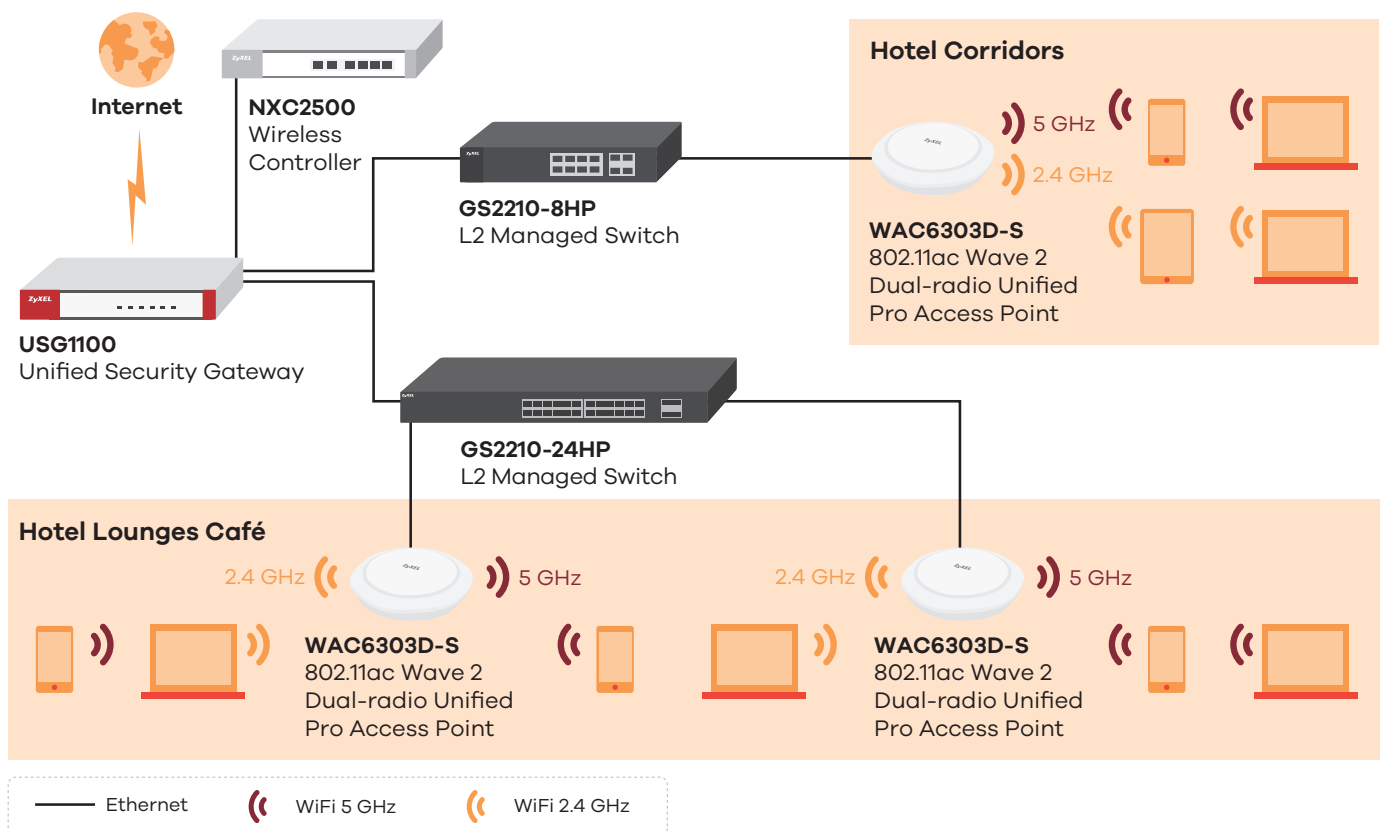

\* WAC6303D-S will support repeater mode and ZyMesh in further features enhancement.

# Specifications

<b>Model</b>		<b>WAC6303D-S</b>		
<b>Product name</b>		802.11ac Wave 2 Dual-Radio Unified Pro Access Point		
				
<b>Main Design</b>				
<b>Wireless frequency</b>		2.4 GHz & 5 GHz		
<b>Radio</b>		2		
<b>RF Specifications</b>				
<b>Frequency band</b>		<table border="0" style="width: 100%;"> <tr> <td style="width: 50%; vertical-align: top;">           2.4 GHz (IEEE 802.11 b/g/n)           <ul style="list-style-type: none"> <li>• USA (FCC): 2.412 to 2.462 GHz</li> <li>• Europe (ETSI): 2.412 to 2.472 GHz</li> <li>• Taiwan (TW): 2.412 to 2.462 GHz</li> </ul> </td> <td style="width: 50%; vertical-align: top;">           5 GHz (IEEE 802.11 a/n/ac)           <ul style="list-style-type: none"> <li>• USA (FCC): 5.15 to 5.25 GHz; 5.725 to 5.850 GHz</li> <li>• European (ETSI): 5.15 to 5.35 GHz; 5.470 to 5.725 GHz</li> <li>• Taiwan (TW): 5.15 to 5.25 GHz; 5.725 to 5.850 GHz</li> </ul> </td> </tr> </table>	2.4 GHz (IEEE 802.11 b/g/n) <ul style="list-style-type: none"> <li>• USA (FCC): 2.412 to 2.462 GHz</li> <li>• Europe (ETSI): 2.412 to 2.472 GHz</li> <li>• Taiwan (TW): 2.412 to 2.462 GHz</li> </ul>	5 GHz (IEEE 802.11 a/n/ac) <ul style="list-style-type: none"> <li>• USA (FCC): 5.15 to 5.25 GHz; 5.725 to 5.850 GHz</li> <li>• European (ETSI): 5.15 to 5.35 GHz; 5.470 to 5.725 GHz</li> <li>• Taiwan (TW): 5.15 to 5.25 GHz; 5.725 to 5.850 GHz</li> </ul>
2.4 GHz (IEEE 802.11 b/g/n) <ul style="list-style-type: none"> <li>• USA (FCC): 2.412 to 2.462 GHz</li> <li>• Europe (ETSI): 2.412 to 2.472 GHz</li> <li>• Taiwan (TW): 2.412 to 2.462 GHz</li> </ul>	5 GHz (IEEE 802.11 a/n/ac) <ul style="list-style-type: none"> <li>• USA (FCC): 5.15 to 5.25 GHz; 5.725 to 5.850 GHz</li> <li>• European (ETSI): 5.15 to 5.35 GHz; 5.470 to 5.725 GHz</li> <li>• Taiwan (TW): 5.15 to 5.25 GHz; 5.725 to 5.850 GHz</li> </ul>			
<b>802.11n/ac premium features</b>		<ul style="list-style-type: none"> <li>• 802.11n: 2x2 MIMO with two spatial stream (SU-MIMO)</li> <li>• 802.11ac: 3x3 MIMO with three spatial stream (SU-, or MU-MIMO)</li> <li>• 802.11ac beamforming (transmit beamforming)</li> <li>• Maximal ratio combining (MRC)</li> <li>• Low End Sensitivity Improvements (LESI)</li> <li>• Time Domain Channel Smoothing</li> <li>• 20-, 40- and 80-MHz channels</li> <li>• PHY data rates total up to 300 Mbps (11n) + 1300 Mbps (11ac)</li> <li>• Packet aggregation: A-MPDU (Tx/Rx), A-MSDU (Tx/Rx)</li> <li>• Cyclic Delay diversity (CSD) support</li> <li>• Maximum Likelihood Demodulation (MLD) support</li> <li>• Low Density Parity Check (LDPC) support</li> </ul>		
<b>Typical transmit output power (dBm)<sup>1</sup></b>	<b>US (FCC) 2.4 GHz</b>	25 dBm		
	<b>US (FCC) 5 GHz</b>	28 dBm		
	<b>EU (ETSI) 2.4 GHz</b>	20 dBm		
	<b>EU (ETSI) 5 GHz</b>	26 dBm		
<b>Number of antenna</b>	<b>2.4 GHz</b>	2x2 MIMO		
	<b>5 GHz</b>	3x3 MIMO		
<b>Antenna gain</b>	<b>2.4 GHz</b>	3 dBi		
	<b>5 GHz</b>	4 dBi		
<b>Support data rate</b>		<ul style="list-style-type: none"> <li>• 802.11a/g: 1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48, and 54 Mbps</li> <li>• 802.11n: up to 300 Mbps in MCS15 (40MHz; 2 Spatial Streams; GI=400ns)</li> <li>• 802.11ac: up to 1300 Mbps in MCS9 (80MHz; 3 Spatial Streams; GI=400ns)</li> </ul>		
<b>Receive sensitivity</b>		Min. Rx sensitivity up to -103 dBm		
<b>Over-the-Air (OTA) sensitivity<sup>2</sup></b>		Min. Rx sensitivity up to -103 dBm		
<b>Interfaces</b>				
<b>Number of 10/100/1000M LAN</b>		2 x switch ports		
<b>Console port</b>		4-Pin serial		
<b>Input power requirements</b>		Direct DC power or Power over Ethernet (PoE) <sup>3</sup>		
<b>PoE</b>		802.3at (Full mode) 802.3af (Restrict 2.4G & 5G radio to one transmit stream only.)		
<b>PoE power draw</b>		16.2 W (802.3at PoE)		

<b>Model</b>	<b>WAC6303D-S</b>	
<b>WLAN Features</b>		
<b>WLAN maximum throughput</b>	Up to 1600 Mbps	
<b>Mesh AP (By License)</b>	Future Support	
<b>Mesh AP for multiple SSID with VLAN (through tunnel mode)</b>	Future Support	
<b>Fast roaming</b>	Pre-authentication and PMK caching	
<b>Wireless Security</b>		
<b>WEP</b>	Yes	
<b>WPA/WPA2-PSK</b>	Yes	
<b>WPA/WPA2-Enterprise</b>	Yes	
<b>WLAN access control list</b>	Yes	
<b>EAP type</b>	EAP-TLS, EAP-TTLS, EAP-PEAP, EAP-FAST, EAP-AKA and EAP-SIM	
<b>IEEE 802.1X</b>	Yes	
<b>Number of SSID</b>	16	
<b>Web authentication<sup>*4</sup></b>	Yes	
<b>MAC filtering</b>	Yes	
<b>Layer-2 Isolation</b>	Yes	
<b>RADIUS authentication</b>	Yes	
<b>Microsoft AD authentication<sup>*4</sup></b>	Yes	
<b>LDAP authentication<sup>*4</sup></b>	Yes	
<b>MAC authentication<sup>*4</sup></b>	Yes	
<b>Rogue AP detection</b>	Yes	
<b>Network</b>		
<b>IPv6 host</b>	Yes	
<b>VLANs</b>	Yes	
<b>DHCP client</b>	Yes	
<b>QoS and Power Save</b>		
<b>WMM</b>	Yes	
<b>WMM power save</b>	Yes	
<b>U-APSD</b>	Yes	
<b>DiffServ marking</b>	Yes	
<b>Management</b>		
<b>ZON Utility<sup>*5</sup></b>	<ul style="list-style-type: none"> <li>• Discovery of Zyxel switches, APs and gateways</li> <li>• Centralized and batch configurations <ul style="list-style-type: none"> <li>• IP configuration</li> <li>• Device reboot</li> <li>• Firmware upgrade</li> <li>• IP renew</li> <li>• Device locating</li> <li>• Password configuration</li> <li>• Device factory reset</li> <li>• Web GUI access</li> <li>• One-click quick association with Zyxel AP Configurator (ZAC)</li> </ul> </li> </ul>	
<b>Smart Connect</b>	<ul style="list-style-type: none"> <li>• Neighbor device discovery</li> <li>• One-click remote management access to the neighboring Zyxel devices</li> </ul>	
<b>Zyxel AP Configurator<sup>*6</sup></b>	<ul style="list-style-type: none"> <li>• Batch AP configuration</li> <li>• Batch AP firmware upgrade</li> <li>• Batch AP profile backup</li> </ul>	
<b>Zyxel Wireless Optimizer<sup>*7</sup></b>	<ul style="list-style-type: none"> <li>• Wi-Fi AP planning</li> <li>• Wi-Fi coverage detection</li> <li>• Wireless health management</li> </ul>	
<b>Standalone AP mode</b>	Yes	
<b>Managed AP mode</b>	Yes	
<b>Repeater AP mode</b>	Future Support	

<b>Model</b>		<b>WAC6303D-S</b>
<b>CLI</b>	Yes	
<b>SNMP</b>	v2c/v3	
<b>Others</b>		
<b>Plenum rating</b>	Yes	
<b>Kensington lock support</b>	Yes	
<b>Power supply</b>	Input: AC 100-240V, 50~60Hz Output: DC +12V 2A (Sold separately)	
<b>MTBF (hr)</b>	3,960,217	
<b>Standard Compliance</b>		
<b>Ethernet</b>	<ul style="list-style-type: none"> <li>• IEEE 802.3</li> <li>• IEEE 802.3u</li> <li>• IEEE 802.11ab</li> <li>• IEEE 802.3au</li> <li>• IEEE 802.3az</li> <li>• IEEE 802.3af/at</li> </ul>	
<b>PoE</b>	IEEE 802.3af/at	
<b>WLAN</b>	<ul style="list-style-type: none"> <li>• 802.11b: DBPSK, DQPSK, CCK</li> <li>• 802.11g: BPSK, QPSK, 16-QAM, 64-QAM</li> <li>• 802.11a: BPSK, QPSK, 16-QAM, 64-QAM</li> <li>• 802.11n: BPSK, QPSK, 16-QAM, 64-QAM</li> <li>• 802.11ac: BPSK, QPSK, 64-QAM, 256-QAM</li> </ul>	
<b>Certifications</b>		
<b>Radio</b>	FCC part 15C, FCC part 15E, ETSI EN 300 328, EN 301 893, LP0002, EN 60601-1-2	
<b>EMC</b>	FCC Part 15B, EN 301 489-1, EN 301 489-17, EN55032, EN55024, EN61000-3-2/-3, BSMI CNS13438	
<b>Safety</b>	EN 60950-1, IEC 60950-1 BSMI CNS14336-1	
<b>Physical Specifications</b>		
<b>Item</b>	<b>Dimensions (WxDxH)(mm/in.)</b>	211 x 223 x 39 / 8.31 x 8.78 x 1.54
	<b>Weight (g/lb.)</b>	800 / 1.76
<b>Packing</b>	<b>Dimensions (WxDxH)(mm/in.)</b>	251 x 247 x 55 / 9.88 x 9.72 x 2.17
	<b>Weight (g/lb.)</b>	1040/ 2.29
<b>Included accessories</b>	<ul style="list-style-type: none"> <li>• Wall/ceiling mount plate</li> <li>• Mounting screws</li> </ul>	
<b>Environmental Specifications</b>		
<b>Operating environment</b>	<b>Temperature</b>	-20°C to 60°C/-4°F to 140°F
	<b>Humidity</b>	10% to 90% (non-condensing)
<b>Storage environment</b>	<b>Temperature</b>	-40°C to 70°C/-40°F to 158°F
	<b>Humidity</b>	10% to 90%

\*1 Maximum output power is limited by regional regulatory.

\*2 OTA sensitivity is measured through the Antenna represents real sensitivity in field application.

\*3 When both power sources are available, DC power takes priority over PoE.

\*4 Supports when working with Zyxel NXC controller.

\*5 Support from ZON Utility V2.1 or above.

\*6 Support from ZAC V1.1.3 or above.

\*7 Support from ZWO V1.0.5 or above

For more product information, visit us on the web at [www.zyxel.com](http://www.zyxel.com)

Copyright © 2017 Zyxel Communications Corp. All rights reserved. Zyxel, Zyxel logo are registered trademarks of Zyxel Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

