

# CS1182/CS1184

## 2/4-port USB DVI Secure KVM Switch



The ATEN CS1182/CS1184 2/4-Port USB DVI Dual-Link Secure KVM Switches offers secure and reliable access for any government/military desktop environment where security is imperative by providing safe switching between computers operating on different secure networks. NIAP-certified according to common criteria's EAL2+ certification, the CS1182/CS1184 provides 2-port/4-port models for secure desktop workstation use.



Hardware security includes tamper-evident tape, chassis intrusion detection, and tamper-proof hardware, while software security includes restricted USB connectivity – non HID's (Human Interface Devices) are ignored when switching – an isolated channel per port that makes it impossible for data to be transferred between secure and unsecure computers, and automatic clearing of the keyboard buffer.

By combining physical security with controlled USB connectivity, the CS1182 / CS1184 gives you the means to consolidate multiple workstations of various security classification levels with one keyboard, monitor and mouse (KVM) console.

### Note:

1. The National Information Assurance Partnership (NIAP) is a United States government initiative to meet the security testing needs of IT consumers and manufacturers. It is operated by the National Security Agency (NSA) and the National Institute of Standards and Technology (NIST).
2. The CS1182/CS1184 additionally satisfies Evaluation Assurance Level 2+ (EAL2+) requirements for Peripheral Sharing Switch (PSS) for Human Interface Devices Protection Profile v2.1.

CS1182




CS1184



## » FEATURES

- 2/4-port USB DVI Dual-Link Secure KVM Switch
- Port selection via Pushbutton only (OSD, hotkey methods are not allowed) to enhance security
- One USB console controls 2/4 secure computers
- NIAP-certified – validated to common criteria EAL2+ security requirements
- Restricted USB connectivity – non HIDs (Human Interface Devices) are ignored when switching
- Isolated channel per port – makes it impossible for data to be transferred between computers
- Tamper-evident tape – provides a visual indication of any attempt to gain access to the switch's internal components
- Chassis intrusion detection – if the cover is removed from the switch, the unit becomes inoperable and the LEDs flash
- Tamper-proof hardware – all integrated circuits are soldered directly to the circuit board to prevent tampering with the components
- Non-reprogrammable ROM – prevents tampering and attempts to reprogram the switch's firmware
- Clears keyboard buffer – keyboard data is automatically cleared after transmission to the switch
- Video DynaSync™ – stores the console monitor's EDID (Extended Display Identification Data) to optimize display resolution
- Multiplatform support – Windows, Linux, Mac, and Sun
- Superior video quality – 2560 x 1600 (DVI Dual Link); 1920 x 1200 (DVI Single Link) and 2048 x 1536 (DVI-A)
- Rugged metal enclosure
- Built-in internal power
- Speaker and microphone support

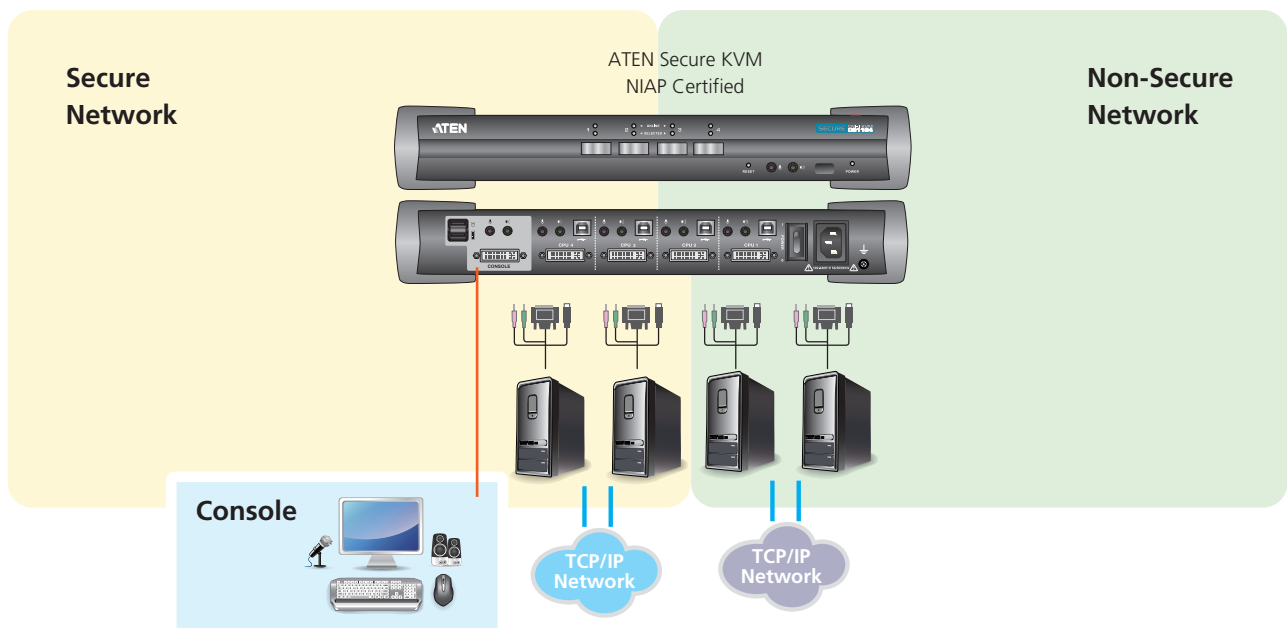

Networks Operating on Different Security Classification Levels

## » Specification

Function				CS1182	CS1184
Computer Connections				2	4
Port Selection				Pushbutton	
Connectors	Console Ports	Keyboard		1 x USB Type-A Female (Black)	
		Video		1 x DVI-I Dual Link Female (White)	
		Mouse		1 x USB Type-A Female (Black)	
		Audio	Speaker	2 x Mini Stereo Jack Female (Green;1 x front panel,1 x rear panel)	
			Microphone	2 x Mini Stereo Jack Female (Pink;1 x front panel,1 x rear panel)	
	KVM Ports	Keyboard / Mouse		2 x USB Type-B Female (White)	4 x USB Type-B Female (White)
		Video		2 x DVI-I Dual Link Female (White)	4 x DVI-I Dual Link Female (White)
		Audio	Speaker	2 x Mini Stereo Jack Female (Green)	4 x Mini Stereo Jack Female (Green)
			Microphone	2 x Mini Stereo Jack Female (Pink)	4 x Mini Stereo Jack Female (Pink)
		Power		1 x 3-prong AC Socket	
Switches	Port Selection		2 x pushbuttons	4 x pushbuttons	
	Reset		1 x Semi-recessed Pushbutton		
	Power		1 x Rocker		
	LEDs	Power		1 (Blue)	
On Line		2 (Green)	4 (Green)		
Selected		2 (Orange)	4 (Orange)		
Emulation	Keyboard / Mouse		USB		
Video				DVI Dual Link: 2560x1600; DVI Single Link: 1920x1200 DVI-A: 2048x1536	
I/P Rating				100–240V AC; 50/60 Hz; 0.5A	
Power Consumption				120V / 5.1 W; 230V / 5.1W	120V / 6.1W; 230V / 5.7W
Environment	Operating Temp.		0–40°C		
	Storage Temp		–20–60°C		
	Humidity		0–80% RH, Non-condensing		
Physical Properties	Housing		Metal		
	Weight		2.06 kg	2.10 kg	
	Dimensions (L x W x H)		34.9 x 16.9 x 6.06 cm		

### ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan

Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com