

DisplayPort CAT5e Extender Series

ITEM NO.: DP02E 4K DisplayPort CAT5e Extender

DP02E DisplayPort CAT5e Extender is based on HDBaseT technology using only one cost effective CAT5e/6 cable to extend your DisplayPort signal up to 70 meters at 1080p, support up to 4K UHD. It is an ideal solution for extending PC/laptop to a display output to a projector/monitor application.

DP02E DisplayPort CAT5e Extender

Features:

- Extends DisplayPort signal over one CAT5e/6 cable.
- DP 1.2a. HDCP compliant.
- Uncompressed high definition video up to 4K UHD.
- Support 1080p@60Hz@16bits at 70M, 4K UHD
- Audio supports up to LPCM 7.1 @ 192KHz, Dolby TrueHD, DTS-HD MA

Installation view:



LED Indication :

Color	Status	DP02ET	DP02ER
GREEN	ON	Power on	
BLUE	LINK	ON : LINK Normal, Flash : Low Power Mode *Low Power Mode : When DP02ETno video input or DP02ER not connect any devices, DP02E will enter a low power mode to save power consumption.	


Cable:

Link cable recommend use high quality Cat.5e 、 Cat.6 、 Cat.6a 、 Cat.7 UTP / STP or FTP cable. Poor quality cable or network connection or improper construction will cause unstable connection, video or sound disruptions, picture noise appears.

Distance chart by different cable:

Cable Type	Range	Supported Video
CAT5e / CAT6	60M	1080p 60Hz 12bit
CAT6a / CAT7	70M	
CAT5e / CAT6	35M	1080p 60Hz 16bit Up to 4096x2160@30Hz 4:4:4(9Gbps) 4096x2160@60Hz 4:2:0(9Gbps)
CAT6a / CAT7	40M	

If connection through the wall socket, the cable length must less 5 meters between HDMI extender and wall jack, as below drawing:

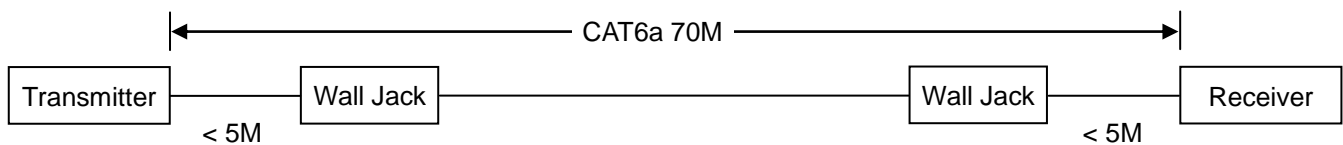

10/100Mbps network connection using general CAT5e cable and working distance up to 60M.


RJ45 Define:

Video Link (TIA/EIA-568-B)


- | | |
|-----------------|---------|
| 1. Orange-white | DATA0 + |
| 2. Orange | DATA0 - |
| 3. Green-white | DATA1 + |
| 4. Blue | DATA2 + |
| 5. Blue-white | DATA2 - |
| 6. Green | DATA1 - |
| 7. Brown-white | DATA3 + |
| 8. Brown | DATA3 - |

Panel view:

DP02ET

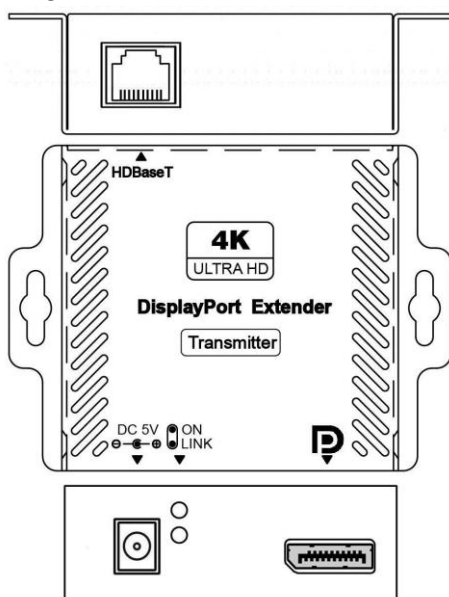

DP02ER

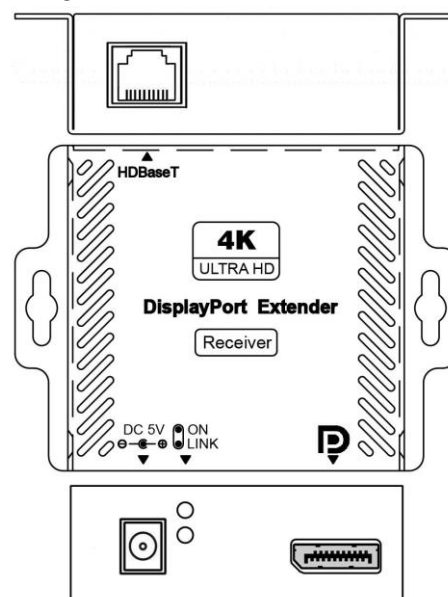

Caution:

This device not support MST (Multi Stream Transport) hub function based on DP1.2

Trouble Shooting:

1. The wiring must away from any equipment with electromagnetic wave, i.e.: mobile phone, microwave, radio equipment, fluorescent lamp, high voltage power lines.
2. The cable must pull in straight to avoid any crosstalk interference and the transmission stability.
3. This device HDBaseT port is not general Ethernet signal; do not connect with Network devices to avoid damage.
4. The receiver unit working temperature is higher which is in normal condition.
5. The bottom dip switch was no function which is reserve.

DP02E Package Include:

DP02ET DVI Transmitter x 1 pcs

DP02ER DVI Receiver x 1 pcs

Mounting Screw pack x 1 bags

Power Adapter x 2 pcs

Specification:

ITEM NO.	DP02ET	DP02ER
DP Video Support	1080p @60Hz@12bit 3D,Up to 4096x2160/30Hz/4:4:4, 4096x2160/60Hz/4:2:0	
DP Audio Support	Up to 7.1 LPCM 192KHz / Dolby TrueHD / DTS-HD MA	
Distance	70M (Max)	
Input / Output Interface	DisplayPort x 1	
RJ45 Connector	RJ45 x 1	
Power Supply	DC 5V 2A	DC 5V 2A
Power Consumption	Max 5W, Low Power 1.32W	Max 8W,Low Power 1.62W
Temperature	Operation: -10 to 45°C, Storage: -30 to 70°C, Humidity: up to 95%	
Dimensions	mm 67 x 95 x 27 (mm)	67 x 95 x 27 (mm)
Weight	g 165	165

RoHS   

Rev. A