

PowerWalker 6-10KVA 19" MBS

Maintenance Bypass Switch

Provides maintenance bypass function

Terminal input and output

19" Rack design

Supports all one phase 6000VA and 10000VA UPS



Item-No. 10120584


Product Features

PowerWalker MBS is used as an external power distribution unit in conjunction with UPS systems or large-scale voltage regulators. It allows to manually transferring the connected equipment to utility power via a bypass switch, permitting scheduled maintenance or UPS replacement without power interruption.

Supports following models:

VFI Series: VFI 6000C, 10000C LCD
 VFI 6000R, 10000R LCD
 VFI 6000P/RT, 10000P/RT LCD
 VFI 6000T, 10000T LCD

- Provides continuous power to connected equipment during UPS maintenance
- Easy operation with simple rotary switch
- Suitable for all one phase 6kVA and 10kVA UPS

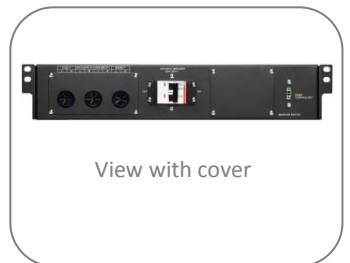

View with cover

Technical Details

Product Features

Power Rating	10kVA (max 63A input)
Voltage Rating	600VAC
Form Factor	2U

Connections

Main Power	Terminal block type (L-N)
Recommended Wires	10 AWG for 6kVA UPS 8AWG for 10kVA UPS
Protection	Overload

Product Details

Dimensions	438 x 158 x 86 mm
Colour	Black
Weight	3kg
Model Code	MBS 6-10kVA 19"

Environment

Temperature	0°C – 40°C
Humidity	0% - 95% RH (non- condensing)

Package Content

Package Content	PowerWalker MBS 6-10kVA 19", manual,
------------------------	---

Logistic Data

Giftbox Language	EN
Manual Language	EN
Dimension/Giftbox	
Weight/Giftbox	
Dimension/carton	
Weight/carton	
Pieces/carton	
Pieces/palette	
Item Number	10120584
EAN-Code	4260074976250
Warranty	24 Months

Version: EN 29/09/2014

We reserve the right for technical changes and mistakes