


PIN OUT

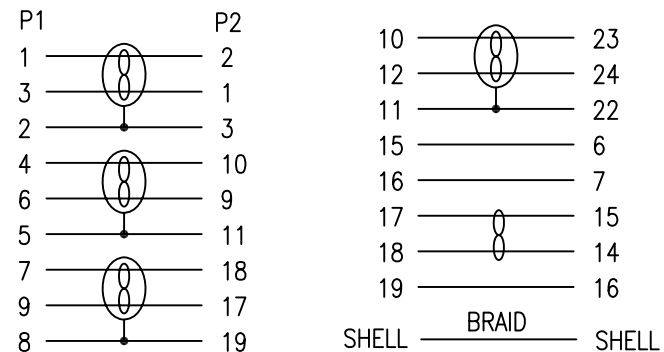

NOTES:

1.ELECTRICAL PROPERTIES:

- 1.1 100% OPEN AND SHORT TEST
- 1.2 CONDUCTOR RESISTANCE: 5 OHMS
- 1.3 INSULATION RESISTANCE: 10 MEGOHMS
- 1.4 HI-POT: DC300V/0.01S
- 1.5 100% HDTV, BLUE RAY DVD TEST(1080P)
- 1.6 ALL CABLE PRODUCTION PROCESS ARE CONTROLLED BY ATC TEST DEVICE.

2. ALL MATERIAL BE RoHS COMPLIANT.

NO.	PARTS NAME	Q'TY	SPECIFICATION
⑩	TAG	1PCS	DELTACO TAG
⑨	CORE MOLD	2PCS	BLACK PVC
⑧	CORE	2PCS	OD*ID*L: 14.3*9.0*28.5mm
⑦	SCREW	2PCS	#4-40 UNC, HOOD MOLDED: WHITE PVC
⑥	DVI HOOD	2PCS	WHITE PVC
⑤	HDMI HOOD	1PCS	BLACK PVC
④	INNER MOLD	1PCS	PE
③	HDMI 19M	1PCS	GOLD PLATED SHELL
②	DVI(18+1)M	1PCS	GOLD PLATED SHELL
①	CABLE	1PCS	UL20276(28AWG*1P+D+FAM)*4+28AWG*1P+28AWG*3C+AEB OD:7.3mm BLACK PVC JACKET

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	HDMI-113-K
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

HDMI 19PIN/M-DVI(18+1)/M

