


- NOTES:
1. ELECTRICAL PROPERTIES:
 - 1.1 100% OPEN AND SHORT TEST
 - 1.2 CONDUCTOR RESISTANCE: 5 OHMS
 - 1.3 INSULATION RESISTANCE: 10 MEGOHMS
 - 1.4 HI-POT: DC300V/0.01S
 - 1.5 100% HDTV, BLUE RAY DVD TEST(1080P)
 - 1.6 ALL CABLE PRODUCTION PROCESS ARE CONTROLLED BY ATC TEST DEVICE.
 2. ALL MATERIAL BE RoHS COMPLIANT.

PIN OUT

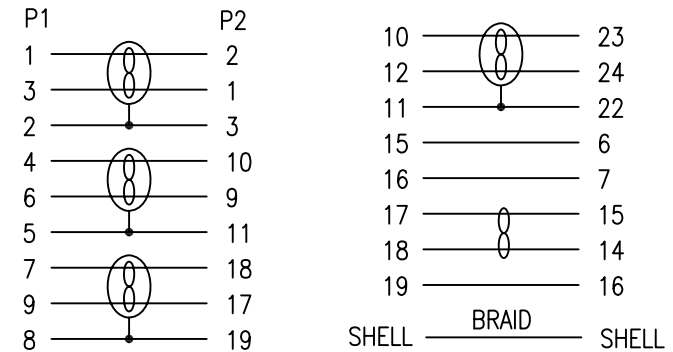

| NO. | PARTS NAME | Q'TY | SPECIFICATION |
|-----|------------|------|---|
| ⑩ | TAG | 1PCS | DELTACO TAG |
| ⑨ | CORE MOLD | 2PCS | BLACK PVC |
| ⑧ | CORE | 2PCS | OD*ID*L: 14.3*9.0*28.5mm |
| ⑦ | SCREW | 2PCS | #4-40 UNC, HOOD MOLDED: WHITE PVC |
| ⑥ | DVI HOOD | 2PCS | WHITE PVC |
| ⑤ | HDMI HOOD | 1PCS | BLACK PVC |
| ④ | INNER MOLD | 1PCS | PE |
| ③ | HDMI 19M | 1PCS | GOLD PLATED SHELL |
| ② | DVI(18+1)M | 1PCS | GOLD PLATED SHELL |
| ① | CABLE | 1PCS | UL20276(28AWG*1P+D+FAM)*4+28AWG*1P+28AWG*3C+AEB OD:7.3mm BLACK PVC JACKET |

| | | | | |
|----------|---------|-------|-----------|----------|
| APPROVED | CHECKED | DRAWN | CUSTOMER: | |
| | | | ITEM NO. | HDMI-116 |
| | | | DRAW NO. | |
| | | | UNIT | mm |
| | | | SCALE | NONE |

DESCRIPTION:
HDMI 19PIN/M-DVI(18+1)/M

