
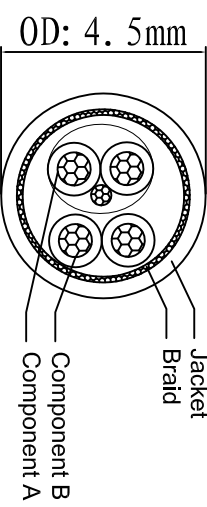
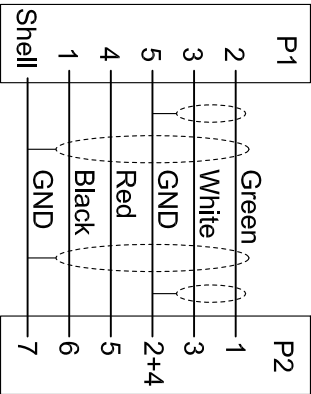
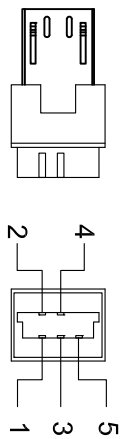



REACH / RoHS Compliant

REV.	DESCRIPTION	DATE
A0	INITIAL RELEASE	2011-07-09

200±15

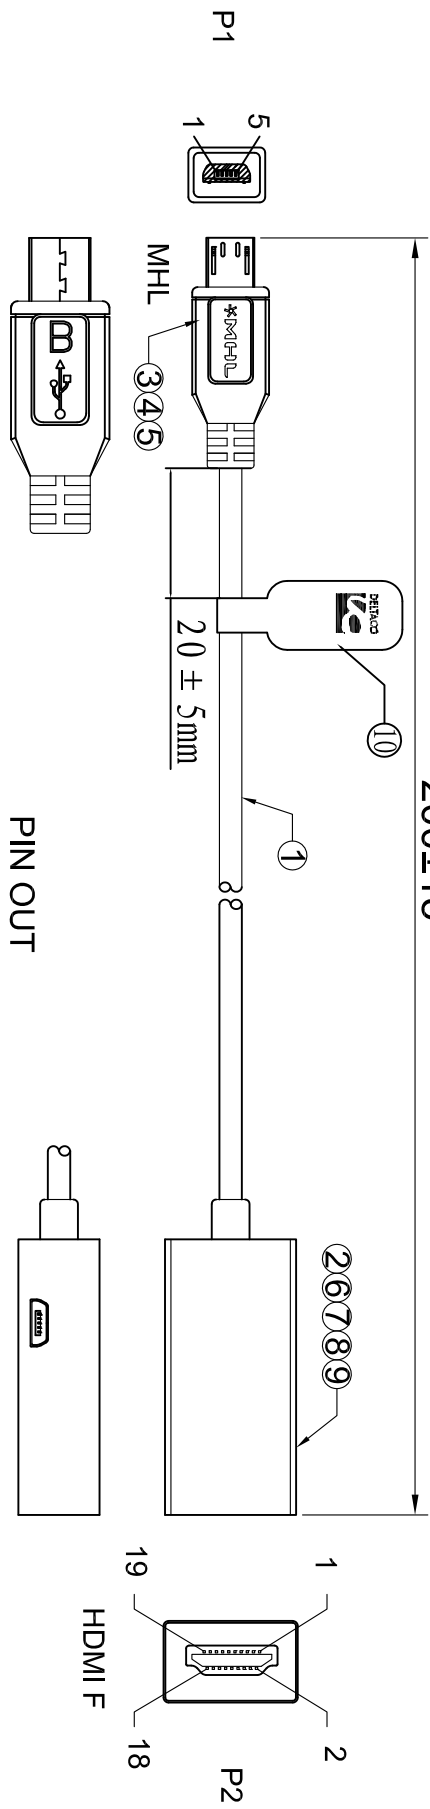

MHL PCB/A

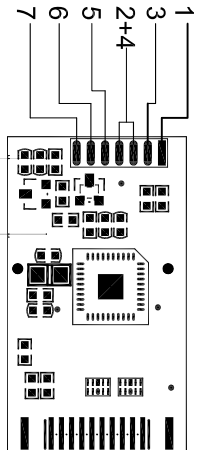

- NOTES:
- ELECTRICAL PROPERTIES:
 - 100% open and short test.
 - Conductor resistance: 5 OHMS
 - Insulation resistance: 10 MEGOHMS
 - Hi pot: DC300V/0.01S
 - Audio & Video test, Output resolution: 1920*1080 P
 - All material be ROHS compliant.

NO.	Material name	Item number	Specifications Description	Quantity
10	tag	AM-BQ0138	Black background, White character(HDMI-MHL3)	1 Pcs
9	Shell	SL-BK0101	MHL F one-piece, BLACK shell(smooth)	1 Pcs
8	Lid	SL-BK0192	MHL F one-piece, BLACK Lid	1 Pcs
7	PVC	PVC-0001	60P PVC BLACK	6.50g
6	PVC	PVC-0007	45P PVC BLACK	15.0g
5	PVC	PVC-0001	60P PVC BLACK	12.0g
4	PE	PE-0001	LDPE(ROHS)	6.00g
3	Connector	CN-N0008	Micro USB (M) black rubber core, nickel plated	1 Pcs
2	Connector	XY-A203-111	HDMI(F)+MicroUSB(F) MHL PCB/A, nickel plated	1 Pcs
1	Cable	CB041-45-2842	UL 27251(P*28AWG+D+AL+MY)+2C*24AWG+AL+BI, JACKET PVC BLACK OD:4.50±0.15mm(90%Shielding rate)	0.15M

图号 (DWG NO)	XY-A0180	单位 (UNIT):	MM
版次 (REV)	A0	比例 (SCALE)	
页次 (PAGE)	1/1	公差 (TOLERANCE UNSPECIFIED)	未注公差 XXX ±0.25 XXX ±0.10 XXX ±0.05 X* ±0.02 X** ±0.01
设计 (DESIGN)	Dean	审核 (CHECKED)	
核准 (APPROVED)		核淮 (APPROVED)	
ITEM	PART NO	PRODUCT SHORT NAME IS	MHL/HD
			HDMI-MHL3

