


| PIN OUT | | | COLOR |
|---------|--------|-----|--------------|
| CN1 | CN2 | | |
| 1 | 1 | —○— | WHITE/ORANGE |
| 2 | 2 | —○— | ORANGE |
| 3 | 3 | —○— | WHITE/GREEN |
| 6 | 6 | —○— | GREEN |
| 4 | 4 | —○— | BLUE |
| 5 | 5 | —○— | WHITE/BLUE |
| 7 | 7 | —○— | WHITE/BROWN |
| 8 | 8 | —○— | BROWN |
| SHIELD | SHIELD | — | DRAIN WIRE |
| | | —○— | PAIR |

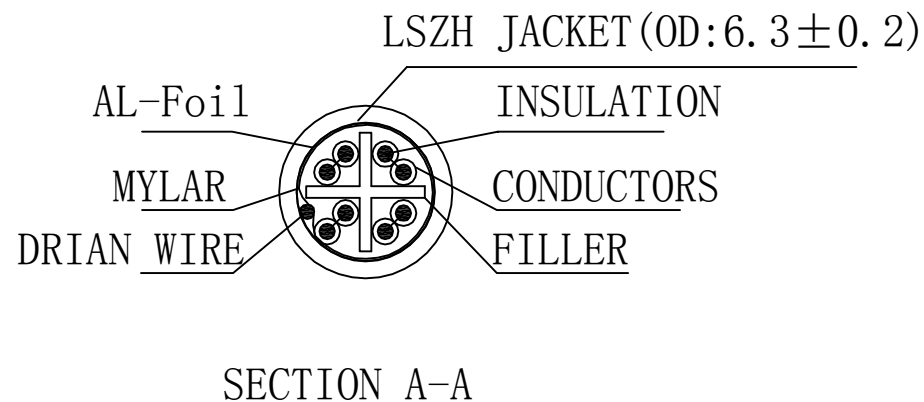

- 1.1 ALL COMPONENTS ARE RoHS COMPLIANT.
- 1.2 100% OPEN AND SHORT TEST.
- 1.3 ALL PRODUCTS PASS TIA CAT 6 CHANNEL TEST
- 1.4 TEMPERATURE RANGE: -20—+60°C

| ③ | MOLDING | 2PCS | ORANGE PVC |
|-----|------------|-------|--|
| ② | CONNECTER | 2PCS | RJ45 (8P8C) MALE WITH METAL SHIELD (NICKEL PLATED), GOLD PLATED PINS |
| ① | CABLE | 1PCS | 26AWG*4P+FILLER+MYLAR+DRAIN WIRE+AL-FOIL +ORANGE LSZH JACKET |
| NO. | PARTS NAME | Q' TY | SPECIFICATION |

| APPROVED | CHECKED | DRAWN | CUSTOMER: | |
|----------|---------|-------|-----------|-----------|
| | | | ITEM NO. | STP-60-OR |
| | | | DRAW NO. | |
| | | | UNIT | mm |
| | | | SCALE | NONE |

DESCRIPTION:
RJ45 (8P8C) M/M, FTP, CAT6 0.5m

